



IN THE UNITED STATES PATENT & TRADEMARK OFFICE
PATENT APPLICATION
Case Docket No. 6563

08/828005

BOX PATENT APPLICATION
ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

"Express Mail" mailing label number EH278988446US

Date of Deposit March 27, 1997

I hereby certify that this paper/fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Assistant Commissioner of Patents, Washington, D.C. 20231.

RODDY M. BULLOCK 37,290
Agent mailing application Reg. No.

Roddy M. Bullock
Signature of Agent mailing application

Sir:

Transmitted herewith for filing is the PATENT APPLICATION:

Inventor(s): GARY DEAN LAVON, ET AL.

Title: ABSORBENT ARTICLES HAVING REMOVABLE COMPONENTS

1. ☒ Enclosed are 12 sheets of drawings.
2. ☒ The filing fee has been calculated as shown below.

	(Col. 1)	(Col. 2)	OTHER THAN A SMALL ENTITY	
FOR:	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$ 770.00
TOTAL CLAIMS	27 -20=	* 7	x22 =	\$ 154.00
INDEP CLAIMS	3 -3=	* -0-	x80 =	\$ -0-
MULTIPLE DEPENDENT CLAIM PRESENTED			+260 =	\$ -0-
*If the difference in Col. 1 is less than zero, enter "0" in Col 2.				
TOTAL				\$ 924.00

The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-2480. A duplicate copy of this sheet is enclosed.

- a. ☒ Any patent application filing fees required under 37 CFR §1.16.
- b. ☒ Any patent application processing fees under 37 CFR §1.17.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 16-2480. A duplicate copy of this sheet is enclosed.

- a. ☒ Any patent application processing fees under 37 CFR §1.17.
- b. ☐ The issue fee set in 37 CFR §1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR §1.311(b).
- c. ☒ Any filing fees under 37 CFR §1.16 for presentation of extra claims.

5. The total number of duplicate copies enclosed is 5. The Commissioner is hereby authorized to make any additional copies of this sheet needed to accomplish the purposes provided for herein and to charge any fee for such copies to Deposit Account No. 16-2480.

Roddy M. Bullock
Roddy M. Bullock
Agent for Applicants
Registration No. 37,290
Tel. No. (513) 634-1948

March 27, 1997
Cincinnati, Ohio



08/828005

A

"Express Mail" mailing label number EH278988446USDate of Deposit March 27, 1997

I hereby certify that this paper/fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner For Patents, Washington, D.C. 20231.

RODDY M. BULLOCK 37,920
Agent mailing application Reg No.
Roddy M. Bullock
Signature of Agent mailing application

ABSORBENT ARTICLES HAVING REMOVABLE COMPONENTS

Gary Dean LaVon
Gerald Alfred Young
Theodora Beck

5

FIELD OF THE INVENTION

This invention relates to absorbent articles, such as disposable diapers. This invention further relates to absorbent articles having multi-piece absorbent cores.

BACKGROUND OF THE INVENTION

- 10 Absorbent articles such as disposable diapers, incontinence pads, training pants, and catamenial napkins generally include an absorbent core for receiving and holding body exudates. The absorbent core typically includes a fibrous web, which can be a nonwoven, airlaid web of natural or synthetic fibers, or combinations thereof. Fibrous webs used in such absorbent articles also often include certain absorbent gelling
- 15 materials usually referred to as "hydrogels," "superabsorbent" or "hydrocolloid" materials to store large quantities of the discharged body fluids. These materials absorb through capillary or osmotic forces, or a combination of both.

- An alternative absorbent material capable of providing capillary fluid transport is open-celled polymeric foams. If made appropriately, open-celled polymeric foams
- 20 provide features of capillary fluid acquisition, transport, and storage required for use in high performance absorbent cores for absorbent articles such as diapers. Absorbent articles containing such foams may also possess desirable wet integrity, provide suitable fit throughout the entire period the article is worn, and may avoid changes in shape during use. In addition, absorbent articles containing such absorbent foam
- 25 structures could be easier to manufacture on a commercial scale. For example, absorbent foam diaper cores could simply be stamped out of continuous foam sheets

10 10

5

20

30

35

replace the entire absorbent article when absorbent core components are saturated.

10- 5 Absorbent articles with removable absorbent inserts are known in the art. For example, U.S. Pat. ^{EN}No. 4,597,761 to Buell, issued July 1, 1986, discloses a disposable absorbent insert for use inside an over-garment such as a conventional reusable diaper, or a disposable diaper. Once the absorbent insert becomes saturated it may be removed and discarded. The absorbent article may then be reused with a fresh absorbent insert. Buell is representative of a general absorbent article design having a continuous fluid impervious backing sheet (backsheet) and a fluid pervious bodyside liner (topsheet) with a removable absorbent core insert disposed between.

10 The absorbent core insert is removed from the body side of the article, necessarily requiring that the absorbent article be removed from the wearer. This removal is often inconvenient and time consuming.

Accordingly, it would be desirable to have an absorbent article that has removable or replaceable absorbent core components wherein the absorbent core components can be removed or replaced without having to remove the absorbent article from the wearer.

15 Additionally, it would be desirable to have an absorbent article that has an absorbent core having removable or replaceable components and a discontinuous backsheet, allowing saturated portions of the absorbent core to be removed through the backsheet discontinuity, thereby exposing unsaturated portions and allowing for prolonged use of reusable portions of an absorbent article.

20 Further, it would be desirable to have an absorbent article with a continuous backsheet affixed to a topsheet about a periphery that has removable or replaceable absorbent core components disposed between the topsheet and backsheet, such that access to absorbent core components is provided by separating the topsheet and backsheet in a predetermined area to form an opening.

SUMMARY OF THE INVENTION

25 The present invention relates to absorbent articles suitable for absorbing and retaining aqueous body fluids. A preferred embodiment of absorbent articles of the present invention comprise a discontinuous, substantially fluid impervious backsheet and an absorbent core disposed adjacent the backsheet. The absorbent core comprises at least one, and preferably a plurality, of core components which are removable, with access for removal provided by at least one discontinuity forming an opening in the backsheet. Once removed, other absorbent core components or layers of components may remain in the absorbent article. Also, additional absorbent core components or layers may be added through the opening in the backsheet.

In a preferred embodiment the absorbent article comprises a plurality of components, including at least a front panel, a rear panel, and a center section. Each of the absorbent components may include layers of absorbent members. Upon saturation with bodily discharges certain components or members of the absorbent core may be removed from the absorbent article through the backsheet. New, unsaturated absorbent components or members may then be positioned in place of the removed saturated components or members, or, more preferably, upon removal of the saturated component or member, an additional unused component or member remains in position for use.

In a further embodiment, an absorbent article comprises a fluid pervious top sheet, and a continuous, substantially fluid impervious backsheet joined to the topsheet about a periphery. A predetermined area of the periphery is separable, whereby the topsheet and backsheet may be separated to form an opening, providing access to removable core components disposed between the topsheet and backsheet.

In a particularly preferred embodiment the absorbent core comprises front and rear absorbent panels or components in fluid communication with a center absorbent component. The center absorbent component preferably has fluid acquisition or acquisition/distribution characteristics, while the front and rear absorbent panels preferably have storage/redistribution characteristics.

BRIEF DESCRIPTION OF THE DRAWINGS

While the specification concludes with claims particularly pointing out and distinctly claiming the present invention, it is believed that the present invention will be better understood from the following description in conjunction with the accompanying Drawing Figures, in which like reference numerals identify like elements, and wherein:

FIG. 1 is a perspective, partially segmented illustration of an embodiment of an absorbent article according to the present invention;

FIG. 2 is a side view, showing in partial cross-section, the absorbent article of FIG. 1;

FIG. 3 is an exploded, perspective, partially segmented illustration of a preferred embodiment of an absorbent article according to the present invention;

FIG. 4 is a side view, showing in partial cross-section, a preferred embodiment of the absorbent article of FIG. 3;

FIG. 5 is a cross-section illustration of a preferred embodiment of a backsheet opening configuration in an absorbent article according to the present invention;

FIG. 6 is a cross-section detail of a preferred configuration of removable

absorbent core components;

FIG. 7 is a cross-section depicting an alternative method of providing for a removable and replaceable absorbent core component of an absorbent article according to the present invention;

5 FIG. 8 is a cross-section depicting an additional alternative method of providing for a removable and replaceable absorbent core component of an absorbent article according to the present invention;

FIG. 9 is an exploded perspective view depicting the relationship between the elements of an embodiment of an absorbent core of the present invention;

10 FIG. 10 is an exploded perspective view depicting an embodiment of an absorbent article according to the present invention;

FIG. 11 shows a top view of an embodiment of an absorbent core useful in an absorbent article according to the present invention;

15 FIG. 12 is an elevational sectional view of the absorbent core of FIG. 11 taken along line 12-12;

FIG. 13 shows an alternative embodiment of an absorbent core similar to that shown in FIGs. 11 and 12;

FIG. 14 schematically shows an apparatus for forming one embodiment of the shaped absorbent cores according to the method of the present invention;

20 FIG. 15 schematically shows an apparatus for forming another embodiment of the shaped absorbent cores according to the method of the present invention;

FIG. 16 is a plan view of a relatively wide continuous rectilinear web after notching;

25 FIG. 17 is a plan view of a relatively wide continuous rectilinear web after a first cutting operation to produce discrete sections;

FIG. 18 is a plan view of the relatively wide rectilinear web discrete sections layered in spaced relationship on relatively narrow continuous rectilinear webs; and

FIG. 19 is a plan view of finished shaped absorbent cores of the present invention as produced by a method of the present invention.

30 **DETAILED DESCRIPTION OF THE INVENTION**

As used herein, the term "absorbent core" refers to a material or combination of materials suitable for absorbing, distributing, and storing aqueous fluids such as body exudates. As used herein, the term "absorbent core component" refers to one of a plurality of absorbent core pieces in a multi-piece absorbent core. As used herein, 35 the term "absorbent core member" refers to one of a plurality of pieces of an absorbent core component, preferably pieces in a layered relationship. The term

"absorbent article" refers to devices which absorb and contain body exudates by use of an absorbent core, and, more specifically, refers to devices which are placed against or in proximity to the body of the wearer to absorb and contain the various exudates discharged from the body. A preferred embodiment of an absorbent article of the present invention is the disposable absorbent article, diaper 60, as shown in FIG. 1. As used herein, the term "diaper" refers to an absorbent article generally worn by infants and incontinent persons that is worn about the lower torso of the wearer. It should be understood, however, that the present invention is also applicable to other absorbent articles such as incontinent briefs, incontinent undergarments, diaper holders and liners, training pants, pull-on diapers, and the like.

FIG. 1 shows in perspective a partially segmented illustration of an embodiment of an absorbent article 60 according to the present invention. The multipiece absorbent core 10 comprising multiple absorbent core components, such as center section 50, front panel 20, and back panel 30, is more fully illustrated and described below with reference to FIG. 9. The multipiece absorbent core 10 is also fully disclosed in the commonly assigned, co-pending application entitled Shaped Absorbent Cores Comprising Multiple Pieces of Absorbent Material and Method for Making Same, U.S. Patent Application Serial No. ^{08/833,015} ~~(to be inserted when ascertained)~~, Attorney Docket No. ⁶⁵⁶⁷ ~~(to be inserted when ascertained)~~, filed ^{March 27, 1997} ~~(to be inserted when ascertained)~~ in the names of Gerald Martin Weber, Gerald Alfred Young, Gregory Wade Taylor, and Gary Dean LaVon, which is hereby incorporated herein by reference.

By forming the absorbent core having discrete components, several desirable results are obtained. First, the core exhibits desirable aesthetics and fit when used in an absorbent article of the present invention due to the use of discontinuous strips or panels of absorbent material. For example, the center section may comprise separate strips or layers, allowing the center section to bend and buckle somewhat independently from adjacent strips (and the front and rear panels) to provide better fit and comfort in the crotch area than is achieved with one-piece absorbent cores.

A second advantage to having the core formed in sections is the ability to independently vary many of the characteristics of the absorbent members. These variations include the acquisition rates, distribution rates, storage capacities and rates, thickness, functionality, and the shape or configuration of the absorbent strips or panels. For example, in a preferred embodiment of an absorbent article of the present invention, three absorbent strip members comprise the center section, with one of the absorbent strip members having relatively greater acquisition characteristics, and the remaining two having relatively greater storage/distribution

08828005 032797

B
B
B

characteristics.

A third benefit resulting from the multipiece absorbent core when used in an absorbent article of the present invention is the capability of removing and/or replacing core components of the absorbent core to regenerate the storage/redistribution capacity of the absorbent core 10. As shown in FIG. 1, a discontinuity in backsheet 62 forms opening 41 and provides access to the absorbent core components, for example, back panel 30; therefore allowing for removal or replacement of absorbent core components. FIG. 2 shows in partial cross-section the absorbent article embodiment shown in perspective in FIG. 1. Additional description of a representative disposable diaper in accordance with the present invention is disclosed below with reference to FIG 9.

In FIGs. 1 and 2, the absorbent core 10 is shown with one layer of center section 50 and one layer of front and back panels, 20 and 30. Since center section 50 and back panel 30 are discrete absorbent components, back panel 30 is removable from the absorbent article 60 through opening 41. Once back panel 30 becomes saturated with bodily discharges, such as urine, it can be removed and replaced with a fresh back panel for continued use of the absorbent article.

As shown in FIGs. 1 and 2, when disposable diaper 60 is being worn, flap 42 may be secured over opening 41 by suitable fasteners 43, such as ~~Velcro~~ ^{VELCRO} strips or adhesive strips (not shown). More preferably, flaps 42 are sealed with releasable adhesive, thereby providing for fluid impermeability when closed, but allowing for multiple openings and closings. Opening 41 forms what may be described as a pocket or pouch, with absorbent core components, for example, back panel 30 being removable and replaceable from the pocket. As shown in FIGs. 1 and 2, to remove back panel 30, flap 42 is lifted, and back panel 30 is extracted out of the absorbent article through opening 41. To replace back panel 30, a fresh, dry absorbent component may be reinserted through backsheet 62 through opening 41. FIG. 2 shows flap 42 in the closed position over opening 41 corresponding to front panel 20 (shown in FIG. 1). In general, front panel 20, back panel 30, and corresponding openings 41 and flaps 42 are substantially similar, but need not be. In an alternative embodiment, it may only be desired to include one opening 41 and flap 42, for example, for access to back panel 30.

By replacing absorbent components, particularly absorbent components that are primarily suited for storage/redistribution, the use of the absorbent article, such as disposable diaper 60, may be prolonged while continuing to draw moisture away from the wearer's skin. As storage/redistribution absorbent core components, e.g., front panel 20 and back panel 30, become saturated, they may become substantially

less effective at absorbing moisture from acquisition/distribution components of center section 50. Consequently, center section 50 becomes more saturated, thereby hindering its ability to absorb as much moisture away from the wearer's skin. However, once absorbent core components such as back panel 30 are replaced, the absorbent suction of the core is regenerated, and once again becomes capable of absorbing moisture from the acquisition/distribution components of center section 50. Therefore, the disposable diaper may be worn longer, and regeneration of the absorbent core may be made without removal of the diaper from the wearer.

In a preferred embodiment of the absorbent article of the present invention, a discontinuity in backsheet 62 forms an aperture, e.g., aperture 44, in the general proximity of front and rear panels 20 and 30, as shown in FIGs. 3 and 4. In this preferred embodiment a backsheet pocket 45 may be affixed adjacent aperture 44. Backsheet pocket 45 serves to contain and position front panel 20 (not shown) and back panel 30 as components made up of layered members, e.g., individual back panel members 34, 35, and 36 in FIG. 4. As one back panel member, e.g., back panel member 34, becomes saturated with bodily discharge it may be removed through backsheet opening 41, exposing a fresh, dry back panel member, e.g., back panel member 35. Backsheet pocket 45 is preferably resilient and pliable, and is a substantially fluid impervious barrier over aperture 44, functionally becoming an extension of backsheet 62.

Back flap 42 is reclosable and preferably resealable, and is preferably positioned so that as flap 42 is secured in a closed position a back panel member, e.g., back panel member 35, is urged into fluid communication with center section 50. FIG. 4 shows flap 42 in the closed and sealed position over opening 41 corresponding to front panel 20 (shown in FIG. 1). In general, front panel 20, back panel 30, and corresponding openings 41 and flaps 42 are substantially similar, but need not be. In an alternative embodiment, it may only be desired to include one opening 41 and flap 42, for example, for access to back panel 30.

FIG. 5 shows a preferred embodiment of the arrangement of back panels 30, again showing representative back panel members 34, 35, and 36 in a layered relationship adjacent aperture ⁴⁴~~41~~ and in fluid communication with center section 50. It is understood that the description in terms of back panels is equally applicable to front panels 20. Removal of back panels through opening 41 may be facilitated by the use of pull tabs, e.g., tabs 46, which may be of any type known in the art, such as a strip of plastic film adhered to each back panel member. Additionally, back panel members may be separated from one another by a fluid impervious blocking layer 47 so that adjacent back panel members are not in fluid communication with each other.

Blocking layer 47 may be any fluid impervious polymer film, such as film suitable for use as a fluid impervious backsheet. As one back panel member becomes saturated by absorption of fluid from center section 50, it may be removed, thereby exposing a substantially dry, fresh back panel member 35 for additional absorption from center section 50. In this manner, the absorbent article may be refreshed or regenerated for a prolonged period of time without removal from the wearer.

FIG. 6 shows a particularly preferred embodiment of the arrangement of back panel members. It is understood that the disclosure in terms of back panel members is equally applicable to front panel members 20. Back panel members 35 and 36 are shown as representative of back panel component 30 in a layered relationship with fluid impervious blocking layer 47 disposed between them. Blocking layer 47 is in a layered relationship with back panel members 35 and 36 and forms a fluid impervious layer between them. A portion of blocking layer 47 is preferably affixed, for example at attachment point 48, to the back panel member being removed. As a substantially saturated back panel member, e.g. back panel member 35, is pulled through backsheet opening 41 by pull tab 46, blocking layer 47 is pulled through as well, thereby leaving the adjacent back panel member, e.g., back panel member 36, in position to be urged into fluid communication with center section 50 through aperture 41.

An alternative embodiment of the front and back panels 20 and 30 of an absorbent article of the present invention is shown in cross-section in FIG. 7. While illustrated in terms of back panel 30, it is understood that the description is equally applicable to front panels 20. As shown in FIG. 7, rather than providing for a backsheet pocket 45 affixed to backsheet 62, a back panel envelope 49 is provided. Back panel envelope 49 has a single back panel 30 enveloped between a substantially fluid impervious layer 54 and a substantially fluid pervious layer 55, and may be affixed, for example, by suitable adhesives 39 known in the art, to the perimeter 38 of aperture 41. Preferably back panel envelope 49 is removably affixed so that as back panel 30 becomes saturated due to absorption of fluid from center section 50 it may be removed and replaced with a fresh, dry back panel envelope 49.

An alternative embodiment of an absorbent article of the present invention has a fluid impervious backsheet without any discontinuities forming an opening through the backsheet. As shown in cross-section in ~~FIG. 7A~~ ^{FIG. 8}, access to removable absorbent core members, e.g., members 34 and 35, is provided by an opening between a topsheet 61 and backsheet 62. As more fully described below with reference to FIG. 10, a fluid pervious topsheet is often used in absorbent articles as the wearer-contacting portion of the article. In an article of the present invention, the topsheet

61 and backsheet 62 may be separable at predetermined areas of the periphery ⁵⁷55, near waistband region 63, either in the front, back, or both. FIG. 2A shows the topsheet and backsheet separated in an open position. The opening formed by the separation of the topsheet and backsheet allows removal or replacement of absorbent core components and is preferably resealable to provide for substantial fluid impermeability. The opening may be made resealable, for example, with a suitable adhesive 56 known in the art.

Those skilled in the art will recognize additional embodiments of absorbent articles providing access to absorbent core components that do not depart from the scope of the present invention. For example, back panel pocket 45 may be formed integrally with backsheet 62 by plastically deforming backsheet 62 in the area of the backsheet adjacent to front and back panels 20 and 30. A backsheet discontinuity in the form of an opening may then be made, by die cut, for example, to allow access to front or back panels. A flap similar to flap 42 of FIG. 1 may be provided along with fastening means 43, to cover the opening in the backsheet.

Furthermore, it is contemplated that additional combinations of absorbent core components or members, placement and absorptive characteristics may be used, with desired functional requirements influencing the ultimate design without departing from the scope of the present invention. In particular, the absorbent core may be configured as described below.

The Absorbent Core

FIG. 9 shows an exploded perspective view depicting the elements of an embodiment of a shaped absorbent core 10 such as may be used in an absorbent article according to the present invention, for example, in a disposable diaper. As depicted in FIGs. 1, 3 and 11, the absorbent core 10 comprises a front panel 20 and a back panel 30, both made of absorbent material, preferably material suitable for fluid storage/redistribution. The front panel 20 has an outer front end 21, an inner front end 22, and a pair of sides 23. Similarly, the back panel 30 has an outer end 31, an inner back end 32, and a pair of sides 33. The front panel 20 has cut-out areas 40 at the intersection of the sides 23, and the inner front end 22. Similarly, the back panel 30 has cut-out areas 40 at the intersection of the sides 33, and the inner back end 32. The cut-out areas 40, or notched portions, join the sides and the inner ends such that the resulting widths of the inner ends 22 and 32 are narrower than that of the outer ends 21 and 31, respectively. By "notched" is meant that instead of a side and end meeting at a generally right angle, some amount of material is removed from the corner to produce an additional edge portion joining the side and end. The additional edge portion of notch 40 may be generally straight, but in a preferred embodiment it

is generally arcuate, as depicted in FIG. 11. It is also contemplated that the notch may have generally straight sides, with the limiting example resulting in a back or front panel being substantially trapezoidal-shaped.

5 In a generally flat, unfolded state, the front panel 20 and back panel 30 are positioned such that the inner front end 22 of front panel 20 is opposed to and spaced from the inner back end 32 of back panel 30 as shown in FIGs. 9-13. The distance between the front and back panels may be varied as necessary. In general the distance will increase as the crotch length increases with the size of the absorbent article.

10 Center section 50 is preferably generally rectilinear. By "generally rectilinear" is meant that preferably the center section is of constant width along its length. In general, however, the center section 50 need only span and overlap front and back panels 20 and 30, and may have a varying width along its length. When made by the method of the present invention, center section 50 is generally rectilinear and extends
15 from about the outer front end 21 of front panel 20, to about the outer back end 31 of back panel 30, as shown in FIG. 10. In use, however, center section 50 need only be in fluid communication with front and back panels 20 and 30, preferably by overlapping in a layered relationship, and may not extend to outer front end 21 or outer back end 31.

20 Generally rectilinear center section 50 may comprise multiple strips of absorbent material, each having individual fluid acquisition, acquisition/distribution or storage/redistribution characteristics, as well as individual shape, width, length and thickness characteristics. For example, in a preferred embodiment, two relatively thin, flexible, resilient, polymeric foam strips 51 are preferably made from the same
25 storage/redistribution material as the front and back panels 20 and 30. The strips 51 and front and back panels 20 and 30, having similar absorptive characteristics and being in fluid communication, act as primary storage/redistribution members.

In a preferred embodiment generally rectilinear strip 52 comprises a relatively thin, flexible, resilient, polymeric foam material having greater fluid acquisition or
30 acquisition/distribution characteristics than strips 51, thereby tending to quickly acquire and partition body exudates for more rapid absorption into storage/redistribution layers 51 and front and back panels 20 and 30.

As described with reference to FIGs. 1-4, the fluid absorbent core can be utilized in disposable products which are capable of absorbing significant quantities
35 of body fluids, such as urine, perspiration, menses, and water in body wastes. Such articles may be prepared in the form of disposable diapers, adult incontinence briefs, and the like. In general these absorbent articles comprise three basic structural

FIG. 10 shows an exploded perspective view of an absorbent core 10 as contemplated for use in a disposable diaper 60 according to the present invention. It should be understood, however, that the absorbent core 10 shown is also useful for other absorbent articles such as incontinent briefs, incontinent pads, training pants, and the like. The diaper 60 depicted in FIG. 10 is a simplified absorbent article that could represent a diaper prior to its being placed on a wearer. It should be understood, however, that the present invention is not limited to the particular type or configuration of diaper shown in FIG. 10.

Disposable diaper 60 is shown in its uncontracted state (i.e., with generally all the elastic induced contraction removed) to more clearly show the construction of the diaper 60. The diaper 60 may comprise a substantially liquid pervious topsheet 61; a substantially liquid impervious backsheet 62 joined with the topsheet 61; and an absorbent core 10 positioned between topsheet 61 and backsheet 62. Additional structural features such as elastic members and fastening means for securing the diaper in place upon a wearer (such as tape tab fasteners) may also be included.

While topsheet **61**, backsheet **62**, and absorbent core **10** can be assembled in a variety of well known configurations, a preferred diaper configuration is described generally in U.S. Patent ^{N2}_A 3,860,003 to Buell, issued January 14, 1975, which is hereby incorporated herein by reference. Alternatively preferred configurations for disposable diapers herein are also disclosed in U.S. Patent ^{N2}_A 4,808,178 to Aziz et al., issued February 28, 1989; U.S. Patent ^{N2}_A 4,695,278 to Lawson, issued September 22, 1987; and U.S. Patent ^{N2}_A 4,816,025 to Foreman, issued March 28, 1989, all of which

MR 10-29-93 35

are hereby incorporated herein by reference.

FIG. 10 shows a preferred embodiment of the diaper **60** in which the topsheet **61** and the backsheet **62** are co-extensive and have length and width dimensions generally larger than those of the absorbent core **10**. The topsheet **61** is joined with
 5 and superimposed on the backsheet **62** thereby forming the periphery of the diaper **60**. The periphery defines the outer perimeter or the edges of the diaper **60**.

The topsheet **61** is compliant, soft feeling, and non-irritating to the wearer's skin. Further, the topsheet **61** is liquid pervious permitting liquids to readily penetrate through its thickness. A suitable topsheet **61** can be manufactured from a wide range
 10 of materials such as porous foams, reticulated foams, apertured plastic films, natural fibers (e.g., wood or cotton fibers), synthetic fibers (e.g., polyester or polypropylene fibers) or from a combination of natural and synthetic fibers. Preferably, the topsheet **61** is made of a hydrophobic material to isolate the wearer's skin from liquids in the absorbent core **10**. A particularly preferred topsheet **61** comprises staple length
 15 polypropylene fibers having a denier of about 1.5, such as Hercules type 151 polypropylene marketed by Hercules, Inc. of Wilmington, Delaware. As used herein, the term "staple length fibers" refers to those fibers having a length of at least about 15.9 mm (0.62 inches).

There are a number of manufacturing techniques which can be used to
 20 manufacture the topsheet **61**. For example, the topsheet **61** can be woven, nonwoven, spunbonded, carded, or the like. A preferred topsheet is carded, and thermally bonded by means well known to those skilled in the fabrics art. Preferably, the topsheet **61** has a weight from about 18 to about 25 grams per square meter, a minimum dry tensile strength of at least about 400 grams per centimeter in the
 25 machine direction, and a wet tensile strength of at least about 55 grams per centimeter in the cross-machine direction.

While it is preferred to have a topsheet as the material nearest the wearer's skin, it is not necessary. It is contemplated that a suitable absorbent core configuration could be used without a topsheet and still produce desirable results such as comfort
 30 and absorbency as well as simplicity in manufacturing and material cost savings. For example, the body-side surface of the absorbent article itself could be made of liquid pervious, soft, compliant, non-irritating materials that substitute for a separate topsheet. Such an absorbent core would only need to be used in combination with a backsheet to provide for comfort and absorbency in an absorbent article.

35 The backsheet **62** is made of a material substantially impervious to liquids and is preferably manufactured from a thin plastic film, although other flexible liquid impervious materials may also be used. Backsheet **62** prevents the exudates absorbed

and contained in the absorbent core 10 from wetting articles which contact the diaper 60 such as bed sheets and undergarments. Preferably, the backsheet 62 is polyethylene film having a thickness from about 0.012 mm (0.5 mil) to about 0.051 centimeters (2.0 mils), although other flexible, liquid impervious materials can be used. As used herein, the term "flexible" refers to materials which are compliant and which will readily conform to the general shape and contours of the wearer's body. The polyethylene film of the backsheet may be used for flap 42 as well, with suitable adhesive fastening making the backsheet of the present invention substantially impervious to fluids.

A suitable polyethylene film is manufactured by Monsanto Chemical Corporation and marketed in the trade as Film No. 8020. The backsheet 62 is preferably embossed and/or matte finished to provide a more clothlike appearance. Further, the backsheet 62 may be "breathable," permitting vapors to escape from the absorbent core 10 while still preventing exudates from passing through the backsheet 62. It is contemplated that a backsheet that is highly breathable but substantially impervious to liquid may be desirable for certain absorbent articles.

The size of the backsheet 62 is dictated by the size of the absorbent core 10 and the exact diaper design selected. In a preferred embodiment, the backsheet 62 has a modified hourglass-shape extending beyond the absorbent core 10 a minimum distance of at least about 1.3 centimeters to at least about 2.5 centimeters (about 0.5 to about 1.0 inch) around the entire diaper periphery. Additionally, according to the present invention more fully described below, the backsheet has at least one opening 41 providing access through the backsheet to a portion of the absorbent core 10.

The topsheet 61 and the backsheet 62 are joined together in any suitable manner. As used herein, the term "joined" encompasses configurations whereby the topsheet 61 is directly joined to the backsheet 62 by affixing the topsheet 61 directly to the backsheet 62, and configurations whereby the topsheet 61 is indirectly joined to the backsheet 62 by affixing the topsheet 61 to intermediate members which in turn are affixed to the backsheet 62. In a preferred embodiment, the topsheet 61 and the backsheet 62 are affixed directly to each other in the diaper periphery by attachment means (not shown) such as an adhesive or any other attachment means as known in the art. For example, a uniform continuous layer of adhesive, a patterned layer of adhesive, or an array of separate lines or spots of adhesive can be used to affix the topsheet 61 to the backsheet 62.

Tape tab fasteners 65 are typically applied to the waistband region 63 of the diaper 60 to provide a fastening means for holding the diaper on the wearer. The tape tab fasteners 65 depicted are representative only. The tape tab fasteners can be any of

those well known in the art, such as the fastening tape disclosed in U.S. Patent 3,848,594 (Buell), issued November 19, 1974, which is hereby incorporated herein by reference. These tape tab fasteners or other diaper fastening means are typically applied near the corners of the diaper 60.

Elastic members 69 are disposed adjacent the periphery of the diaper 60, preferably along each longitudinal edge 64, so that the elastic members tend to draw and hold the diaper 60 against the legs of the wearer. Additionally, elastic members 67 can be disposed adjacent either or both of the waistband regions 63 of the diaper 60 to provide a waistband as well as or rather than leg cuffs. For example, a suitable waistband is disclosed in U.S. Patent 4,515,595 (Kievit et al.), issued May 7, 1985, which is hereby incorporated herein by reference. In addition, a method and apparatus suitable for manufacturing a disposable diaper having elastically contractible elastic members is described in U.S. Patent 4,081,301 (Buell), issued March 28, 1978, which is hereby incorporated herein by reference.

The elastic members are secured to the diaper 60 in an elastically contractible condition so that in a normally unrestrained configuration, the elastic members effectively contract or gather the diaper 60. The elastic members can be secured in an elastically contractible condition in at least two ways. For example, the elastic members can be stretched and secured while the diaper 60 is in an uncontracted condition. Alternatively, the diaper 60 can be contracted, for example, by pleating, and the elastic members secured and connected to the diaper 60 while the elastic members are in their unrelaxed or unstretched condition. The elastic members may extend along a portion of the length of the diaper 60. Alternatively, the elastic members can extend the entire length of the diaper 60, or any other length suitable to provide an elastically contractible line. The length of the elastic members is dictated by the diaper design.

In use, the diaper 60 is applied to a wearer by positioning one waistband region under the wearer's back, and drawing the remainder of the diaper 60 between the wearer's legs so that the other waistband region is positioned across the front of the wearer. The tape-tab 65 or other fasteners are then secured preferably to outwardly facing areas of the diaper 60, as shown in FIGS. 2 and 4, for example. In use, the disposable diapers or other absorbent articles of the present invention tend to more quickly and efficiently distribute and store liquids and to remain dry due to the high absorbent capacity of the fluid absorbent members. Disposable diapers incorporating the fluid absorbent members of the present invention can also be thinner and more flexible.

When used as an absorbent core in a disposable diaper 60, a preferred embodiment of the core 10 is positioned such that acquisition/distribution strip 52 is

in fluid contact with topsheet 61, and serves to quickly acquire and partition body exudates from the wearer's body to the generally more absorptive storage/redistribution strips 51 and front and back panels, 20 and 30. The front panel 20 generally corresponds to the portion of the disposable diaper worn in the front of the wearer, with the outer front end 21 being generally near the wearer's waist area. Similarly, the back panel 30 corresponds to the portion of the disposable diaper worn in the back of the wearer, with the outer back end 31 being generally near the wearer's waist area. Generally rectilinear center section 50 has a width 53 corresponding to a suitable width for the crotch area 66 of a disposable diaper. As well, the length generally rectilinear center section 50 may be varied to provide a suitable fit for various wearer sizes.

FIG. 11 shows a top view of a shaped absorbent core 10, contemplated as one embodiment useful in an absorbent article of the present invention. As shown, the front and back panels 20 and 30, together with generally rectilinear center section 50, form generally an elongated hourglass shape suitable for use in a disposable diaper or similar absorbent article. In a preferred embodiment the width 53 of generally rectilinear center section 50 is suitable for comfortably fitting within the crotch area of the wearer when absorbent core 10 is incorporated into an absorbent article, such as a disposable diaper.

The number and placement of strips 51 or 52 of generally rectilinear center section 50 may be varied to achieve desired characteristics such as thinness, softness, flexibility, or beneficial fluid acquisition, distribution, and storage rates. For example, FIG. 12 shows in cross-section an embodiment using one acquisition/distribution strip 52 and one storage/redistribution strip 51, both placed over front and back storage/redistribution panels 20 and 30, resulting in a thin, flexible absorbent core 10. By "over" is meant the side of the absorbent core of the invention corresponding to the wearer's body when used in an absorbent article such as a disposable diaper.

The number of layers of front and back panels 20 or 30 may also be varied to achieve desired characteristics such as beneficial fluid acquisition and distribution rates, as well as capacity and storage rates. If more than one layer of absorbent material is used in the front or back panels, the panels are herein referred to as components, and the individual layers are herein referred to as members. For example, FIG. 13 shows in cross-section an additional embodiment corresponding to the general top view of FIG. 11. FIG. 13 depicts two members of front and back panels 20 and 30, corresponding, for example, to back panel members 34 and 35, shown in FIG. 4. As shown in FIG. 13, both back panel members may be placed under center section 50. As described above with reference to FIGs. 5 and 6, front

or back panel may be separated by fluid impervious material with beneficial results.

In summary, absorbent core 10 comprises a plurality of discrete components, each component capable of having distinct fluid acquisition, acquisition/distribution, or storage/redistribution characteristics. In the context of the present invention, it should be noted that the term "fluid" means "liquid." So long as the acquisition, acquisition/distribution, and storage/redistribution components are in fluid communication with adjacent components, they may be positioned relative to one another in a wide variety of configurations. Representative materials suitable for use with the present invention will now be described in greater detail.

10 Absorbent Core Materials

As described above, the absorbent core 10 comprises a plurality of discrete components, each component may comprise discrete members, each capable of having distinct fluid acquisition, acquisition/distribution, or storage/redistribution characteristics. The components or members may be made of any absorbent material or combination of materials having enough structural integrity to be handled as a discrete unit. Typical materials known in the art may be used, such as fibrous nonwoven materials, fibrous wet-laid web materials, and combinations of fibrous materials having absorbent gelling materials dispersed upon or within the fibrous structure. If necessary, such fibrous nonwoven materials may be formed into a pouch, of material, being substantially enveloped a fluid pervious web that provides the structural integrity for removal and replacement into the article of the present invention.

Particularly preferred absorbent materials for use as absorbent components or members are foam-based in nature. Polymeric foams which are suitable for use in the fluid acquisition component can in general be characterized as structures which result when a relatively monomer-free gas or relatively monomer-free liquid is dispersed as bubbles in a polymerizable monomer-containing liquid, followed by polymerization of the polymerizable monomers in the monomer-containing liquid which surrounds the bubbles. The resulting polymerized dispersion can be in the form of a porous solidified structure which is an aggregate of cells, the boundaries or walls of which cells comprise solid polymerized material. The cells themselves contain the relatively monomer-free gas or relatively monomer-free liquid, which, prior to polymerization, had formed the "bubbles" in the liquid.

Particularly suitable absorbent foams for absorbent articles such as diapers have been made from High Internal Phase Emulsions (hereafter referred to as "HIPE"). See, for example, U.S. Patent ^{Ni} 5,260,345 issued to DesMarais et al. on November 9, 1993, U.S. Patent ^{Ni} 5,268,224 issued to DesMarais et al. on December 7, 1993, and

me
10-19-92

U.S. Patent 5,563,179 issued to Stone et al. on October 18, 1996, each of which is hereby incorporated herein by reference. These absorbent HIPE foams provide desirable fluid handling properties, including: (a) relatively good acquisition rates to quickly acquire gushes of urine; (b) relatively good wicking and fluid distribution characteristics to transport the imbibed urine or other body fluid away from the initial impingement zone and into the unused balance of the foam structure to allow for subsequent gushes of fluid to be accommodated; and (c) a relatively high storage capacity with a relatively high fluid capacity under load, i.e. under compressive forces.

HIPE absorbent foams are also sufficiently flexible and soft so as to provide a high degree of comfort to the wearer of an absorbent article; some can be made relatively thin until subsequently wetted by the absorbed body fluid. See also the aforementioned Young et al. '345 patent, and U.S. Patent 5,318,554 issued to Young et al. on June 7, 1994, which discloses absorbent cores having a fluid acquisition/distribution component that can be a hydrophilic, flexible, open-celled foam such as a melamine-formaldehyde foam (e.g., BASOTECT® made by BASF), and a fluid storage/redistribution component that is a HIPE-based absorbent foam.

Representative materials suitable for use with the present invention are not limited to HIPE foams, and will now be described in greater detail.

The Acquisition Component

One element of an absorbent core is a fluid acquisition component which comprises a porous absorbent structure that has certain fluid handling characteristics with respect to discharged aqueous body fluids, e.g., urine, passing onto and into this structure through, for example, the topsheet of an absorbent article as described above. Since such fluid is frequently discharged in gushes, the acquisition component must be able to quickly acquire, temporarily hold, and also preferably transport (or partition) fluid, e.g., by wicking or other mechanisms, from the point of initial fluid contact to other parts of the acquisition component for eventual absorption into the adjacent fluid acquisition/distribution or storage/redistribution components.

Any porous absorbent material which will imbibe and partition aqueous body fluids to acquisition/distribution or storage/redistribution components of the core may be used as the acquisition layer 52. One measure of the fluid acquisition effectiveness of the absorbent material used to form the acquisition component is the Fluid Acquisition Rate, whereby measurements are made of the time taken for aliquots of synthetic urine test liquid deposited onto the surface of an absorbent material to be absorbed into the internal structure of the absorbent material. Suitable fluid acquisition rates and test methods are disclosed generally in the aforementioned

Young et al. '345 patent. Accordingly, the fluid acquisition component should be fashioned from an absorbent material which exhibits an initial Fluid Acquisition Rate of at least about 2 ml of synthetic urine per second. More preferably, the fluid acquisition component will comprise an absorbent material which exhibits an initial Fluid Acquisition Rate of at least about 6 ml of synthetic urine per second. The "initial" fluid Acquisition Rate is the time taken for the first aliquot of such test liquid to be absorbed into the absorbent material before such material already contains any of the synthetic urine test liquid.

Preferred absorbent materials for the acquisition component include synthetic fiber nonwoven materials, cellulosic nonwoven materials, and various synthetic/cellulosic nonwoven materials. A preferred synthetic nonwoven material is disclosed in commonly assigned, U.S. Pat. No. 4,988,345 to Reising, issued January 29, 1991, and U.S. Pat. No. 4,988,344 to Reising, issued January 29, 1991, both of which are hereby incorporated herein by reference. The Reising acquisition layer comprises a first layer of hydrophilic fibrous material of lower average density than the other portions of the first layer so that it quickly acquires discharged liquids.

A preferred cellulosic nonwoven suitable for acquisition core components is formed from cellulose fibers that impart certain web and dry density characteristics to the absorbent core component. More specifically, the portions or regions of an absorbent core that acquire discharged bodily fluids will preferably have an average dry density of less than about 0.30 g/cc, and average density upon wetting with 1.0%, NaCl aqueous solution of less than about 0.20 g/cc, and an average dry basis weight from about 0.001 to about 0.10 g/cm². Preferred cellulosic nonwoven materials also comprise from about 50% to 100% chemically stiffened, twisted, and curled cellulosic fibers and from 0% to about 50% binding means. Such a cellulosic nonwoven is disclosed in the aforementioned Young '345 patent, and commonly assigned U.S. Pat. No. 5,531,728 to Lash, issued July 2, 1996, which is hereby incorporated herein by reference.

The acquisition layer may be comprised of several different materials including nonwoven webs of synthetic fibers including polyester, polypropylene, or polyethylene, natural fibers including cotton or cellulose, blends of such fibers, or any equivalent materials or combinations of materials. Examples of such acquisition materials are more fully described in U.S. Pat. No. 4,950,264, to Osborn, issued on August 21, 1990, which is hereby incorporated herein by reference. Cellulosic fibers, in addition to being chemically stiffened, may also be advantageously combined with high surface area fibers, such as eucalyptus fibers, as disclosed in commonly assigned, co-pending S.N. 08/686,076, to Seger et al., filed July 24, 1996, the disclosure of

which is hereby incorporated herein by reference. The chemically stiffened fibers and eucalyptus fibers may be coformed in a stratified manner with thermoplastic binding means or chemical binding means, as taught in the aforementioned Seger reference.

Preferable thermoplastic binder means, including preferable thermoplastic fibers, are disclosed in commonly assigned U.S. Pat. No. 5,549,589 to Horney et al., issued on August 27, 1996, which is hereby incorporated herein by reference. Thermoplastic binding means may include any hot melt adhesive which can be melted at temperatures which will not extensively damage the cellulosic fibers. Once thermally set, the resulting nonwoven material exhibits wet/dry mechanical properties such as flexibility, resiliency and structural integrity such that it may be processed as rollstock in the method of the present invention.

If chemical binding means are used to give the nonwoven structural integrity, preferably the absorbent member will comprise between about 80% and about 95% of the chemically stiffened fibers, from about 3% to 20% of a high surface area fiber, and from 0% to about 5% of a chemical additive binding means. A presently preferred chemical additive binding means is the commercially available polyacrylamide-glyoxal resin marketed by Cytec Industries, West Patterson, N.J., under the trade name Parez™ 631 NC. Additional suitable fiber types and chemical additive binder means are disclosed in commonly assigned S.N. 08/633,630 to Seger et al., filed April 17, 1996, the disclosure of which is hereby incorporated by reference.

Other acquisition materials may be prepared by wetlaying in accordance with commonly assigned U.S. Pat. No. 5,217,445 to Young et al., issued June 8, 1993, which is hereby incorporated herein by reference. In general, wetlaid webs can be made by depositing an aqueous slurry of fibers on to a foraminous forming wire, dewatering the wetlaid slurry to form a wet web, and drying the wet web. Further disclosure of particular wetlaying techniques suitable for forming an acquisition core component suitable for use in the present invention are disclosed in the aforementioned Young '345 patent. Besides acquiring body fluids rapidly, the absorbent acquisition component of the present invention should give up this fluid efficiently to other fluid acquisition/distribution or storage/redistribution components, including foam-based fluid storage components. Absorbent foams suitable for use as the acquisition component of the present invention combine relatively high capillary absorption pressures and capacity-per-weight properties (compared to conventional foams). Such foams are disclosed in U.S. Patent 5,550,167 issued to Des Marais et al. on August 27, 1996, which is hereby incorporated herein by reference.

The Fluid Acquisition/Distribution Components

The fluid acquisition/distribution components may comprise similar materials as the acquisition component, with more distributive characteristics. Since discharged aqueous body fluid, e.g., urine, frequently discharge in gushes, the acquisition/distribution component must be able to quickly acquire and must also preferably transport fluid, e.g., by wicking or other mechanisms, from the point of initial fluid contact to other parts of the acquisition /distribution component for eventual absorption into the adjacent fluid storage/redistribution component. Such materials are preferably polymeric foam materials having a greater degree of distributive capacity such that body exudates may more efficiently be transported from the acquisition zone to the storage components of the absorbent core.

Absorbent materials comprising the fluid acquisition/distribution component of the articles herein will preferably be suitably effective at transporting absorbed liquid from one part or region of the acquisition/distribution component to another. Such liquid transport will frequently arise by virtue of the propensity of the acquisition/distribution component absorbent material to wick liquid through its structure. Accordingly, one measure of the fluid distribution effectiveness of the absorbent material used to form the acquisition/distribution component relates to the ability of such absorbent material to vertically wick synthetic urine.

Vertical wicking effectiveness can be measured and quantified in a number of ways, but one typical indicator of vertical wicking performance is the height to which a vertically positioned test strip of absorbent material will wick synthetic urine from a reservoir within a specified period of time. For purposes of the present invention, this height, termed the Vertical Wicking Height, is determined by the procedure described in the aforementioned Young et al. '345 patent. The fluid acquisition/distribution component of the articles herein will preferably be formed from absorbent material which exhibits a 30-minute Vertical Wicking Height of at least about 5 cm. More preferably, the fluid acquisition/distribution component will comprise absorbent material which has a 30-minute Vertical Wicking Height of at least about 10 cm, and most preferably the absorbent material which exhibits a Vertical Wicking Height of 25 cm.

Any porous absorbent material which will imbibe and partition aqueous body fluids to the extent set forth hereinbefore in terms of Fluid Acquisition Rate and preferably Vertical Wicking Height may be utilized as, or as part of, the fluid acquisition/distribution component of the absorbent articles disclosed herein. Frequently such absorbent material can be foam-based and/or fiber-based in nature.

A preferred embodiment utilizes an open-celled absorbent polymeric foam

material that, in addition to functioning as an acquisition/distribution component in an absorbent core, has improved desorption properties to allow other core components having higher absorption pressures than the desorption pressure of the acquisition/distribution foam to partition away fluid. In particular, absorbent foams useful in or as the fluid acquisition/distribution component are those which have a pore volume of from about 2 to 100 ml/g, a capillary suction specific surface area of from about 0.2 to 1 m²/g; a cell size of from about 10 to 300 microns and a density of from about 0.01 to 0.5 g/cm³, provided values for these parameters are selected so that the absorbent foams exceed the aforementioned Vertical Wicking Rate minimum. The concepts of foam flexibility, hydrophilicity, pore volume, capillary suction, specific surface area, cell size, and density as relate to the present invention are described in greater detail in the aforementioned Young et al. '345 patent. Open-celled absorbent polymeric foam materials suitable for use as acquisition/distribution components in the present invention are described in the aforementioned Stone et al. '179 patent.

Other types of non-woven structures suitable for use as the fluid acquisition/distribution component include structures such as surfactant-treated bonded carded webs, webs of melt blown synthetic macrofibers or microfibers, pulp coformed webs, staple fiber coformed webs and the like. If non-woven fibrous absorbent structures are utilized in the present invention, such webs are preferably constructed essentially from hydrophilic chemically stiffened cellulosic fibers. Such cellulosic fibers are typically wood pulp fibers which have been stiffened with an intrafiber chemical stiffening agent and otherwise processed so they are formed into a twisted, curled configuration, as fully taught in the aforementioned Lash and Young et al. '345 patents, as well as the Seger '630 patent application.

The Fluid Storage/Redistribution Components

An absorbent core suitable for use with the present invention comprises at least one, and preferable two, distinct fluid storage/redistribution core components. The fluid storage/redistribution core components act to store body exudates away from the wearers body so as to leave the wearer with a feeling of dryness and to prevent leakage. The storage/redistribution core components are maintained in fluid communication with the acquisition or acquisition/distribution layer(s) such that urine or other aqueous body fluids present in the acquisition/distribution component can be desorbed, being absorbed by the fluid storage/redistribution component(s).

Fibrous nonwoven materials as described above, particularly when combined with particulates of substantially water insoluble, absorbent hydrogel-forming polymer materials, may be useful as the fluid storage/redistribution component(s).

Particularly useful are nonwoven materials containing absorbent gelling materials such as disclosed in U.S. Patent 5,061,259 to Goldman et. al, issued October 29, 1991, ~~U.S. Patent 4,654,039 to Brandt et al., issued March 31, 1987 (reissued April 19, 1988 as Re. 32,649), U.S. Patent 4,666,983 to Tsubakimoto et al., issued May 19, 1987, and U.S. Patent 4,625,001 to Tsubakimoto et al., issued November 25, 1986, all of which are hereby incorporated herein by reference; absorbent macrostructures made from these absorbent gelling materials such as those disclosed in U.S. Patent 5,102,597 to Roe et al., issued April 7, 1992, and U.S. Patent 5,324,561 to Rezai et al., issued June 23, 1994, both of which are hereby incorporated herein by reference; absorbent gelling materials laminated between two tissue layers such as those disclosed in U.S. Patent 4,260,443 to Lindsay et al., issued April 7, 1981, U.S. Patent 4,467,012 to Pedersen et al., issued August 21, 1984, U.S. Patent 4,715,918 to Lang, issued December 29, 1987; U.S. Patent 4,773,903 to Weisman et al., issued September 27, 1988; U.S. Patent 4,851,069 to Packard et al., issued July 25, 1989; U.S. Patent 4,923,454, to Seymour et al., issued May 8, 1990; U.S. Patent 4,950,264 to Osborn, issued August 21, 1990; U.S. Patent 4,994,037 to Bernardin, issued February 19, 1991; U.S. Patent 5,009,650 to Bernardin, issued April 23, 1991; U.S. Patent 5,009,653 to Osborn, issued April 23, 1991; U.S. Patent 5,128,082 to Makoui, July 7, 1992; U.S. Patent 5,149,335 to Kellenberger et al., issued September 22, 1992; and U.S. Patent 5,176,668 to Bernardin, issued January 5, 1993, all of which are hereby incorporated herein by reference~~

A preferred fluid storage/redistribution component of the absorbent core comprises cohesive sheets made from particulates of substantially water insoluble, absorbent hydrogel-forming polymer materials. Sheets may be made by layering predetermined amounts of the hydrogel-forming materials with cross-linking agents and curing. A preferred material of this type is disclosed in commonly assigned U.S. Pat. No. 5,324,561 to Rezai et al., issued June 28, 1994, which is hereby incorporated herein by reference.

The most preferred fluid storage/redistribution component materials comprise collapsible polymeric foam materials that, upon contact with aqueous fluids (in particular aqueous body fluids such as urine), may expand and absorb these fluids. These absorbent polymeric foam materials comprise a hydrophilic, flexible, nonionic polymeric foam structure of interconnected open-cells as disclosed in U.S. Patent 5,387,207 issued to Dyer et al. on issued February 7, 1995, and copending S.N. 08/563,866, entitled Absorbent Foam Materials for Aqueous Fluids Made From High Internal Phase Emulsions Having Very High Water-to-Oil Ratios, by DesMarais et al., filed November 29, 1995, both of which are hereby incorporated by reference.

Other suitable polymeric absorbent foam materials, material characteristics, and characterizing tests are disclosed and taught in the aforementioned Young et al. '345 patent.

5 Polymeric foams materials suitable for use as a storage/redistribution component in an article of the present invention should have high capillary absorption pressures, also known as capillary suction, to effectively desorb adjacent acquisition and acquisition/distribution components. Capillary absorption pressures can be measured using a vertical wicking absorbent capacity test as described in detail in the TEST METHODS section of the aforementioned Dyer et al. '207 patent. Data from
10 the vertical wicking absorbent capacity test provides the curve from which the capillary absorption pressure is determined. Preferred absorbent foams for use in an article of the present invention have capillary absorption pressures of from about 3 to about 20 cm. Particularly preferred absorbent foams have capillary absorption pressures of from about 3 to about 15 cm.

15 The collapsible polymeric foam storage/redistribution component may utilize low density (when expanded) absorbent foams. For a given expanded thickness, these lower density foams are thinner in their collapsed state than prior absorbent HIPE foams. These lower density foams more efficiently utilize the available polymer material and as a result provide an economically attractive means for achieving
20 thinner absorbent cores for absorbent articles such as diapers, pull-up training pants, adult incontinence pads or briefs, sanitary napkins, and the like. This is achieved while retaining desired capillary absorption pressures, dryness, and mechanical properties.

The Method and Apparatus for Making Shaped Absorbent Cores

25 A preferred method of making the shaped absorbent core suitable for use with the present invention is now described with reference to FIGs. 14-19. FIG. 14 schematically shows a representative apparatus 70 suitable for accomplishing the method of forming the absorbent core components of the preferred embodiment of the present invention as depicted in FIG. 1. The method depicted in FIG. 14 and
30 described in detail below can be easily modified to produce absorbent cores comprising different combinations and placement of absorbent members, such as those depicted in FIGs. 12 and 13. Representative modifications are shown schematically in FIG. 15 and, unless otherwise disclosed, can be understood with reference to the description of the method of FIG. 14 since like numerals identify like
35 elements. The method is not limited to nonwoven web materials or absorbent polymeric foam materials, but is suitable for use with any generally absorbent material formed into webs, either nonwoven or woven, fibrous or polymeric, as

known in the art that may be supplied on rollstock and have sufficient integrity to be processed by the method disclosed.

A first relatively narrow rectilinear web **81** is unwound from a supply roll **71**. Web **81** has a width generally corresponding to width **53** of the generally rectilinear center section **50**, as shown in FIGs. 1, 3, 9 and 10. Web **81** comprises a material suitable for use as an acquisition/distribution layer **52** of the preferred embodiment as shown in FIGs. 9 and 10. Web **81** is guided through entry point **100** onto a conveyor **102** where it is positioned for further processing as described below.

In a preferred embodiment, second and third relatively narrow rectilinear webs **82** and **83**, comprised of a material suitable for acquisition/distribution or storage/redistribution of aqueous fluid, are unwound from supply rolls **72** and **73**, respectively. Webs **82** and **83** correspond to storage/redistribution layers **52** of FIGs. 9 and 10 and may have a width generally corresponding to width **53** of the center section **50**. Webs **82** and **83** are guided through entry point **100** onto a conveyor **102** where they are positioned in layers upon web **81** for further processing as described below.

A relatively wide continuous rectilinear web **84** of absorbent material having a longitudinal axis and lateral sides is unwound from a supply roll **74**. In a preferred embodiment, web **84** is suitable for use as a storage/redistribution member of the absorbent core **10**, and is of a width suitable for forming into the front panel **20** and back panel **30** shown in FIGs. 1, 3, 9 and 10. The lateral sides of web **84** generally correspond to the sides **23** and **33** depicted in FIG. 11.

Web **84** is guided from roll **74** to a notching apparatus **90**. Notching apparatus **90** preferably comprises two nip rollers **91** and **92** through which web **84** is fed. As web **84** is fed through nip **93** of rollers **91** and **92**, cutting blades (not shown) on roller **91** notch out substantially arcuate portions from opposing sides of web **84** so that as web **84** leaves the notching apparatus **90**, it appears as shown in FIG. 16. FIG. 16 shows the continuous rectilinear web **84** with substantially arcuate notches **120** at spaced intervals **121** corresponding to the placement of the cutting blades on roller **91**, shown in FIG. 14.

The continuous rectilinear web **84**, notched as shown in FIG. 16, is next fed into a first slip and cut assembly **95** for making cuts transverse to the longitudinal axis that sever the rectilinear web **84** into discrete sections **85**, and to separate the discrete sections as shown in FIG. 17. Web **84** is guided onto rotating drum **96** that serves as a platen. Once in contact with the surface of rotating drum **96**, and prior to being cut into discrete sections, web **84** is moving at a speed less than that of the surface of the drum and slips relative to the surface of the drum **96** under light

vacuum applied through perforations in the surface of the drum. Once web 84 is cut into discrete sections 85, a somewhat higher vacuum is applied so that severed sections 85 remain in contact with the rotating drum 96, moving at the same speed as the surface of the drum in a spaced apart relationship. Cutting roller 97 rotates in concert with rotating drum 96, the diameter of cutting roller 97 being such that a cutting blade 98 attached to cutting roller 97 severs rectilinear web 84 at the spaced intervals 121 of FIG. 16, forming the discrete sections 85. As shown in FIG. 17, the discrete sections 85 can best be described as generally rectangular in shape with notched corners 40, corresponding to the notches 40 of FIG. 11.

The rotating drum 96 is positioned such that upon rotation, discrete sections 85 are brought into contact with layer 83 moving upon conveyor 102. The vacuum arrangement in rotating drum 96 is such that at the position of contact with layer 83, discrete section 85 is released from rotating drum 96 and continues to be carried upon layer 83 by conveyor 102. The linear velocity of conveyor 102 is generally equal to the tangential linear velocity of rotating drum 96, so discrete sections 85 are deposited in a spaced relationship onto layer 83, as depicted in FIG. 18.

FIG. 18 shows in plan view the material being carried by conveyor 102 at, for example, point 103 in FIG. 14. Layer 83, and layers 82 and 81 below (not shown), form continuous rectilinear webs under discrete sections 85 laying in a spaced apart relationship. Discrete sections 85 are spaced apart at spaced intervals 130, corresponding generally with the distance between transverse centerlines 131 of adjacent discrete sections 85.

The material being carried on conveyor 102 is fed into a second slip and cut assembly 150 for making transverse cuts severing all the layers of material. Cutting roller 152 has a diameter corresponding generally to the distance between the transverse centerlines 131 of discrete sections 85 as shown in FIG. 18. Roller 151 serves as a platen for a cutting blade 153 attached to cutting roller 152. Cutting blade 153 completely severs the layers at or near transverse centerlines 131 of discrete sections 85. Upon exiting the second slip and cut assembly 150, the absorbent material has been formed into the individual absorbent cores 10 of the present invention. Various known methods may be used to separate the individual absorbent cores 10, such as by varying the relative speeds of conveyors 102 and 160. The individual absorbent cores 10 are carried by conveyor 160 for further processing into absorbent articles, if necessary, and appear on conveyor 160 in plan view as shown in FIG. 19.

As shown in FIG. 19, it is not necessary for the length of front panel 20 measured from outer front end 21 to inner front end 22 to equal the length of the

back panel 30 measured from its outer back end 31 to its inner back end 32. The position of the layered material on conveyor 102 in relation to the second slip and cut assembly 150 determines the relative lengths of front panel 20 and back panel 30. In a preferred embodiment of the present invention the back panel 30 is longer than the front panel 20 as depicted in FIG. 19. Such a configuration lends itself to a better fit when the absorbent core 10 is used in a disposable diaper.

As shown in FIGs. 14 and 15, the length of interval 130 may be varied to produce the desired length of center section 50. It is desirable to be able to vary the length of center section 50 of an absorbent core 10 for use in disposable diapers to accommodate the difference in sizes of children or adults using such diapers.

FIG. 15 shows an embodiment of a method and apparatus as it may be to produce the core depicted in FIG. 5. Rather than a third relatively narrow rectilinear web 83, unwound from supply roll 73, relatively narrow rectilinear web 86 is unwound from supply roll 76. Web 86 is then guided to form a top layer of absorbent material on conveyor 102. The method continues as disclosed above to form the absorbent core depicted in FIG. 5.

FIG. 15 shows a representative method for forming the absorbent core 10 as depicted in FIG. 13. In this embodiment, an additional relatively wide continuous rectilinear web 87 of absorbent material having a longitudinal axis and lateral sides is unwound from a supply roll 77 and is guided into contact and alignment with web 84 prior to entry into notcher 90. Webs 84 and 87 may be adhered together by known methods to facilitate proper alignment throughout the remainder of the process, particularly after being processed by slip and cut assembly 95.

The method disclosed provides a number of significant benefits. For example, the method generates significantly less scrap than would a typical method of forming a one-piece shaped absorbent core. Also, the method provides for efficient supplying of webs of absorbent materials from rollstock, especially foam, from which the panels and rectilinear strips are made. One advantage of such a process is a longer web roll life. For example, the narrower webs of absorbent material used to make the rectilinear strips can be spool wound for significantly longer roll life. A third benefit of the method disclosed is greater control over certain processing variables, such as placement of core components in proper operating relationship. For example, because the wider web of absorbent material is notched and severed at the point the front and back panels are made, it is significantly easier to register the notched/severed panels in the appropriate relationship with the narrower rectilinear strip(s) to make the composite absorbent core.

While particular embodiments of the present invention have been illustrated and

described, it would be obvious to those skilled in the art that various other changes and modification can be made without departing from the spirit and scope of the present invention. The foregoing is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of the present invention.

WHAT IS CLAIMED IS:

4
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

1. An absorbent article for acquiring bodily fluids from a wearer comprising:
 - (a) a backsheet; and
 - (b) at least one removable absorbent core component disposed adjacent said backsheet;

5 wherein said backsheet includes means for providing access to said removable absorbent core component through said backsheet, such that said removable absorbent core component may be removed from said absorbent article through said backsheet.

- Sub A
2. The absorbent article of Claim 1, wherein said backsheet comprises substantially fluid impervious material, and wherein said means for providing access includes a backsheet portion which is fluid pervious, said fluid pervious portion defining an opening adjacent said removable absorbent core member.

3. The absorbent article of Claim 1, wherein said removable absorbent core component comprises nonwoven fibrous material.

4. The absorbent article of Claim 1, wherein said removable absorbent core component comprises absorbent gelling materials.

5. The absorbent article of Claim 1, wherein said removable absorbent core component comprises open-celled polymeric foam material.

6. The absorbent article of Claim 1, wherein said removable absorbent core component exhibits absorption pressures of from about 3 to about 15 cm.

- Sub A2
7. The absorbent article of Claim 1, comprising at least two removable absorbent core members.

8. The absorbent article of Claim 7, wherein said removable absorbent core members are disposed in layered relationship.

9. The absorbent article of Claim 8, wherein said removable absorbent core members are further disposed in layered relationship with at least one fluid impervious blocking layer disposed between said removable absorbent core members.

Sub
a3

10. The absorbent article of Claim 9, wherein each of said fluid impervious blocking layers are attached to one said removable absorbent core member, thereby being removable with said removable absorbent core member.
11. An absorbent article for acquiring bodily fluids from a wearer, said absorbent article having a front waist region, a rear waist region, and a crotch region, said absorbent article further comprising:
 - (a) a backsheet; and
 - (b) an absorbent core disposed between said backsheet and said wearer, said absorbent core comprising:
 - at least one first absorbent core component disposed in said crotch region and which extends substantially to said front and rear waist regions; and
 - at least one second absorbent core component removably disposed in fluid communication with said first absorbent core component;wherein said backsheet includes means for providing access to said second absorbent core component through said backsheet, whereby said second absorbent core component may be removed from said absorbent article through said backsheet.
12. The absorbent article of Claim 11, wherein said first absorbent core component comprises fibrous nonwoven material.
13. The absorbent article of Claim 11, wherein said first absorbent core component comprises open-celled polymeric foam material.
14. The absorbent article of Claim 11, wherein said first absorbent core component comprises fibrous nonwoven material and open-celled polymeric foam material.
15. The absorbent article of Claim 11, wherein said first absorbent core component comprises absorbent gelling materials.
16. The absorbent article of Claim 11, wherein said first absorbent core component comprises at least two first absorbent core members in fluid communication in layered relationship.

- 5

26. The absorbent article of Claim 23, wherein said removable absorbent core component comprises open-celled polymeric foam material.
27. The absorbent article of Claim 23, wherein said removable absorbent core component exhibits absorption pressures of from about 3 to about 15 cm.

ABSORBENT ARTICLES HAVING REMOVABLE COMPONENTS

ABSTRACT OF THE DISCLOSURE

B The present invention relates to absorbent articles suitable for absorbing and
 retaining aqueous body fluids. Absorbent articles of the present invention ^{have} ~~comprise~~ a
 discontinuous, substantially fluid impervious backsheet and an absorbent core
 disposed between ^a ~~the~~ topsheet and the backsheet. The absorbent core ^{has} ~~comprises~~ a
 plurality of core components which are removable, with access for removal provided
 by at least one discontinuity forming an opening in the backsheet. Once removed,
 other absorbent core components or layers of components may remain in the
 absorbent article. Also, additional absorbent core components or layers may be
 added through the opening in the backsheet. In a preferred embodiment the
 absorbent core ^{has} ~~comprises~~ a plurality of components, including at least a front panel, a
 rear panel, and a center section. Each of the absorbent components may include
 layers of absorbent members. Upon saturation with bodily discharges certain
 components or members of the absorbent core may be removed from the absorbent
 article through the backsheet. New, unsaturated absorbent components or members
 may then be positioned in place of the removed saturated components or members,
 or, more preferably, upon removal of the saturated component or member, an
 additional unused component or member may remain in position for use.

26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596

FIG 1

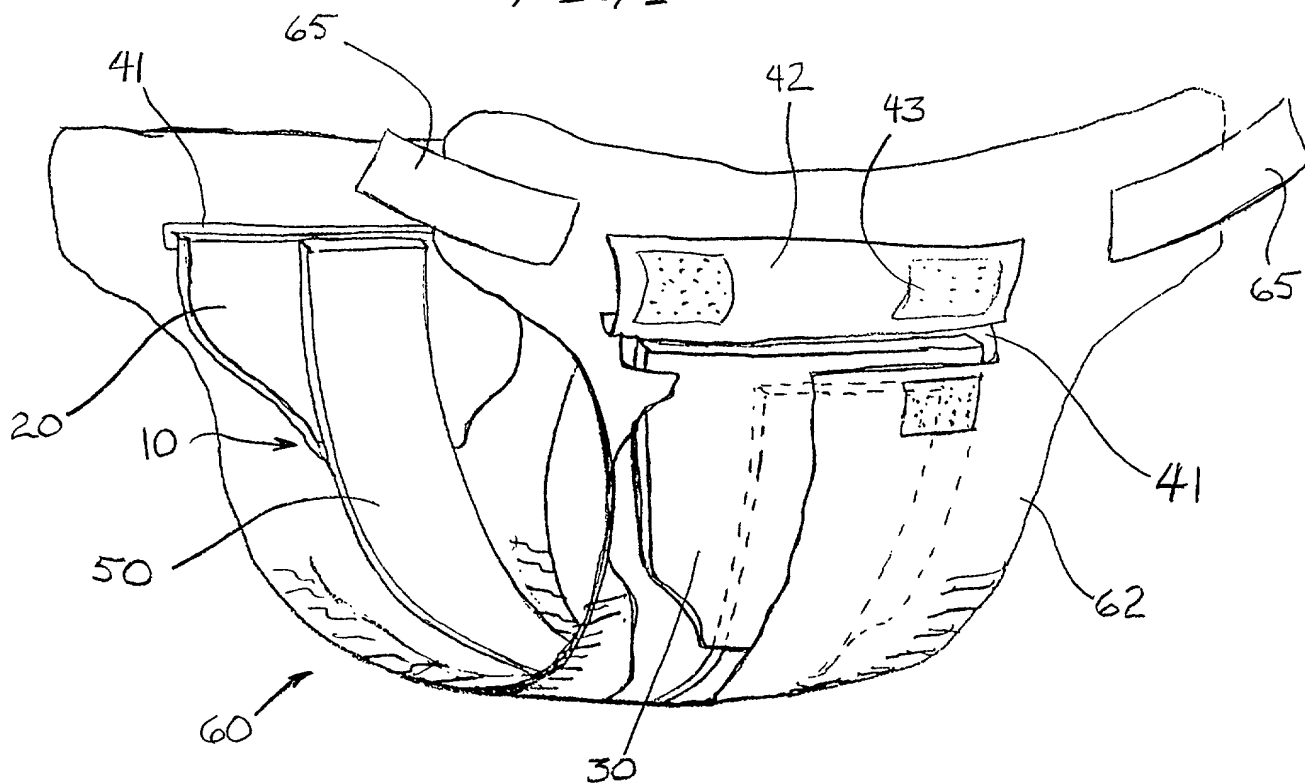


FIG 2

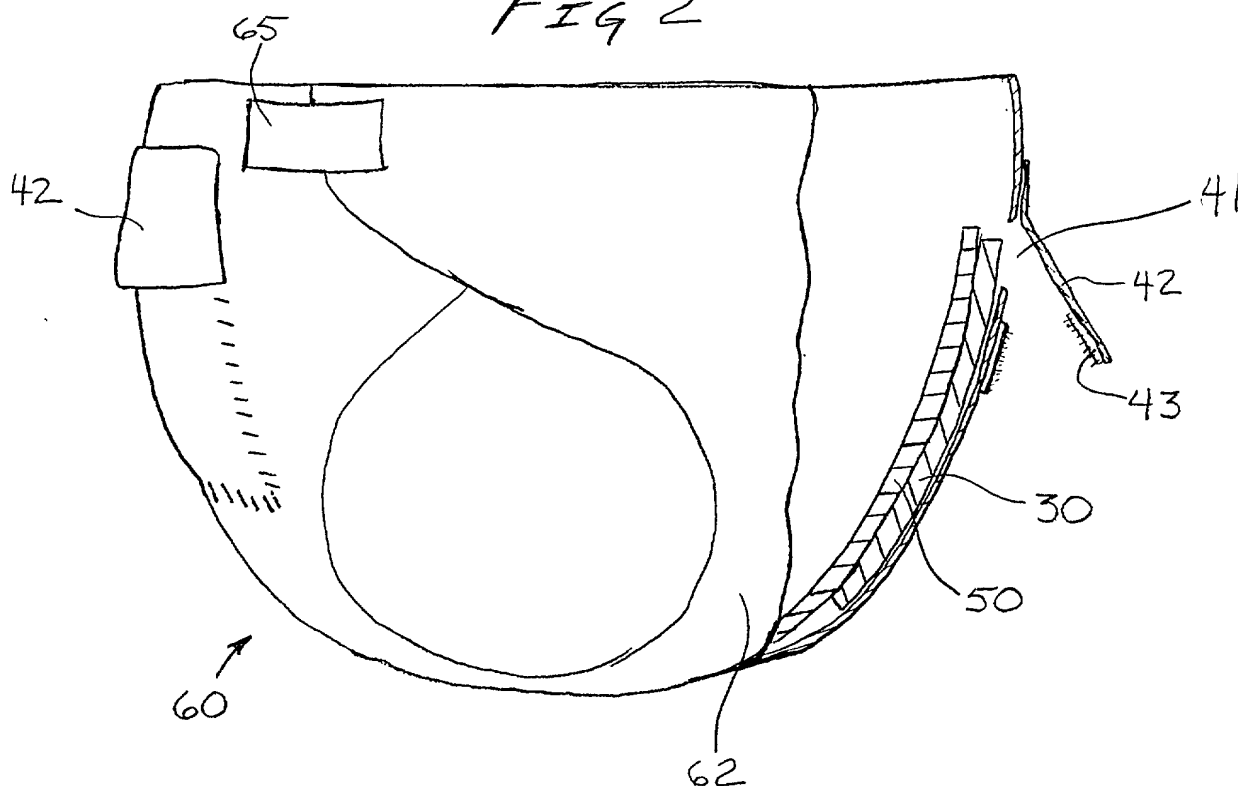


FIG 3

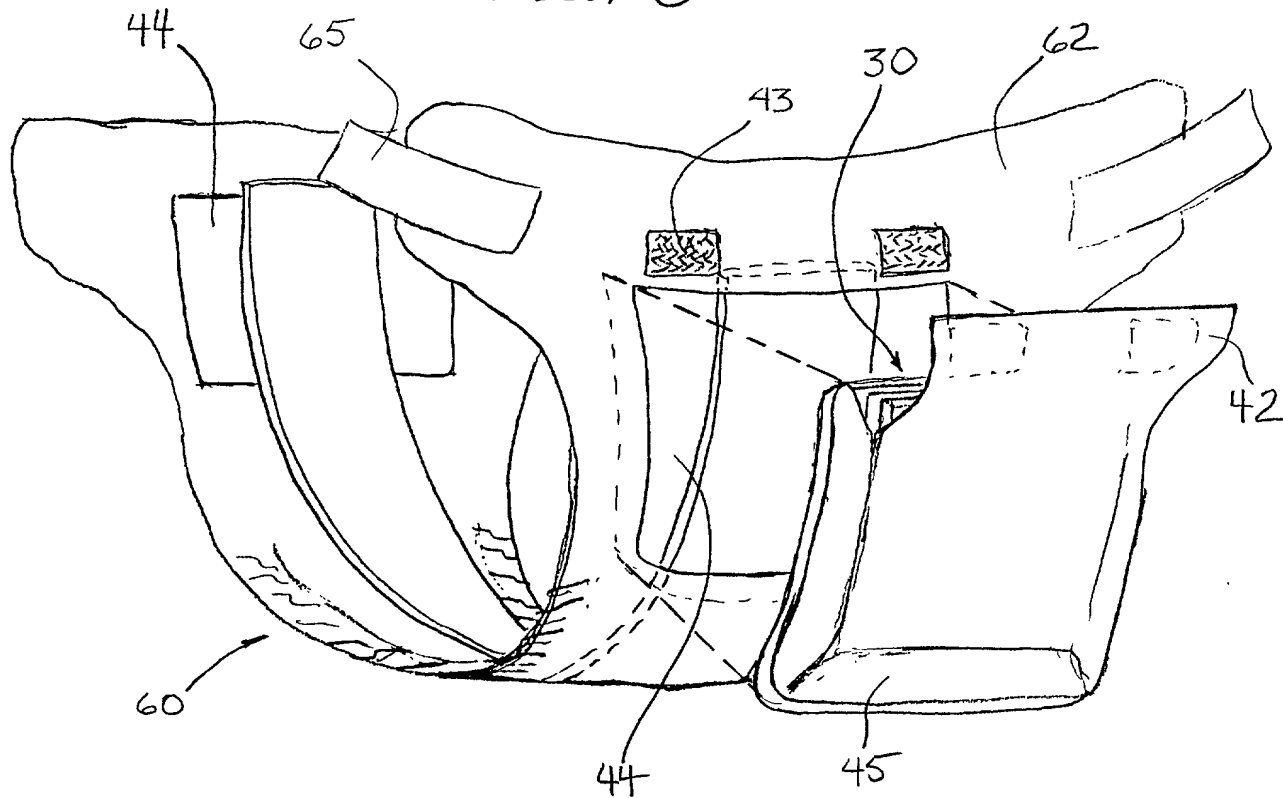


FIG 4


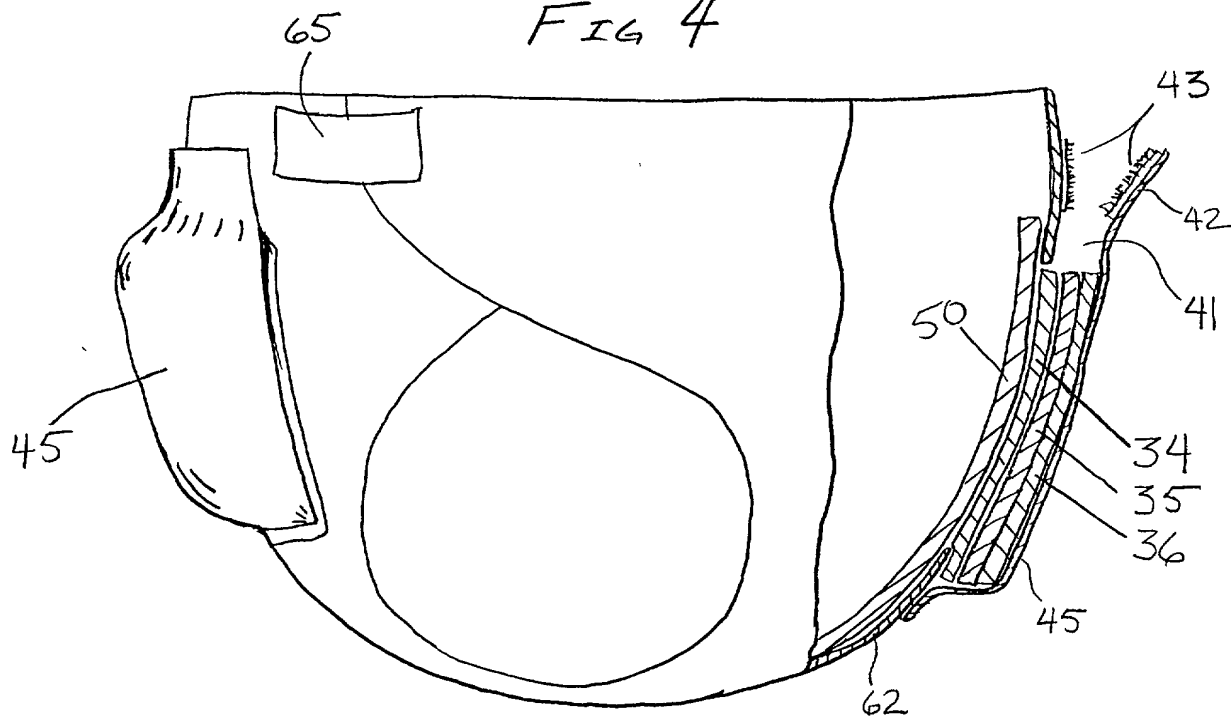


FIG 5

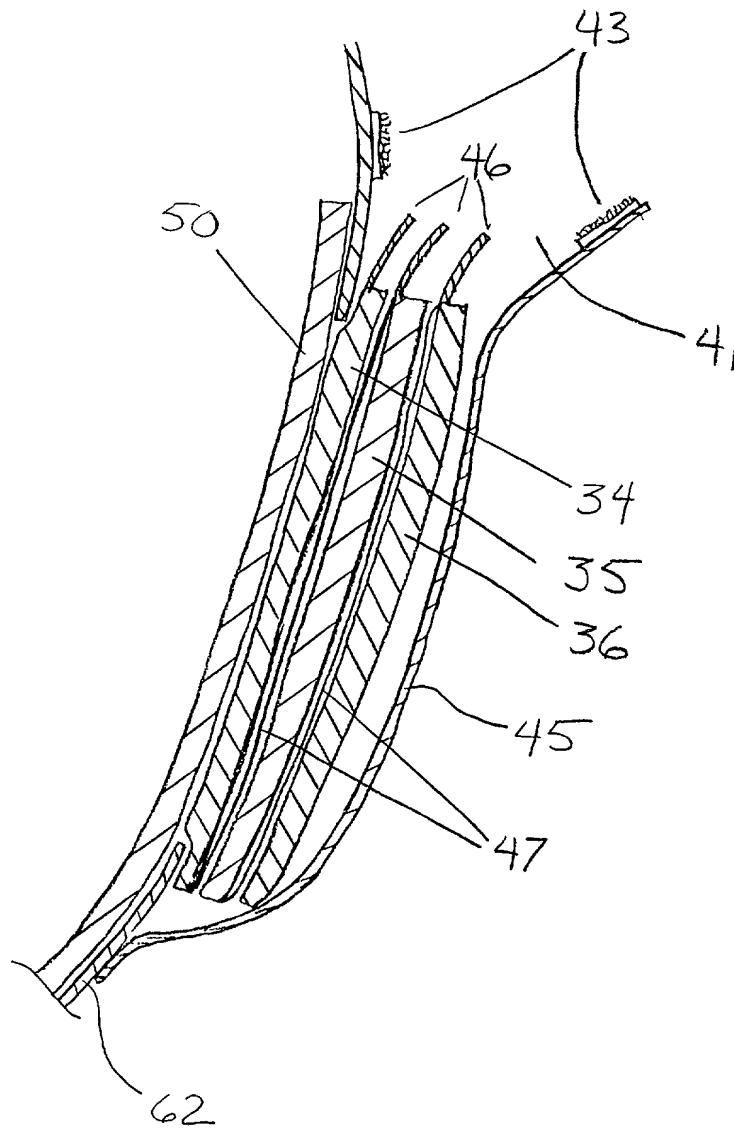

4/12

08/828005

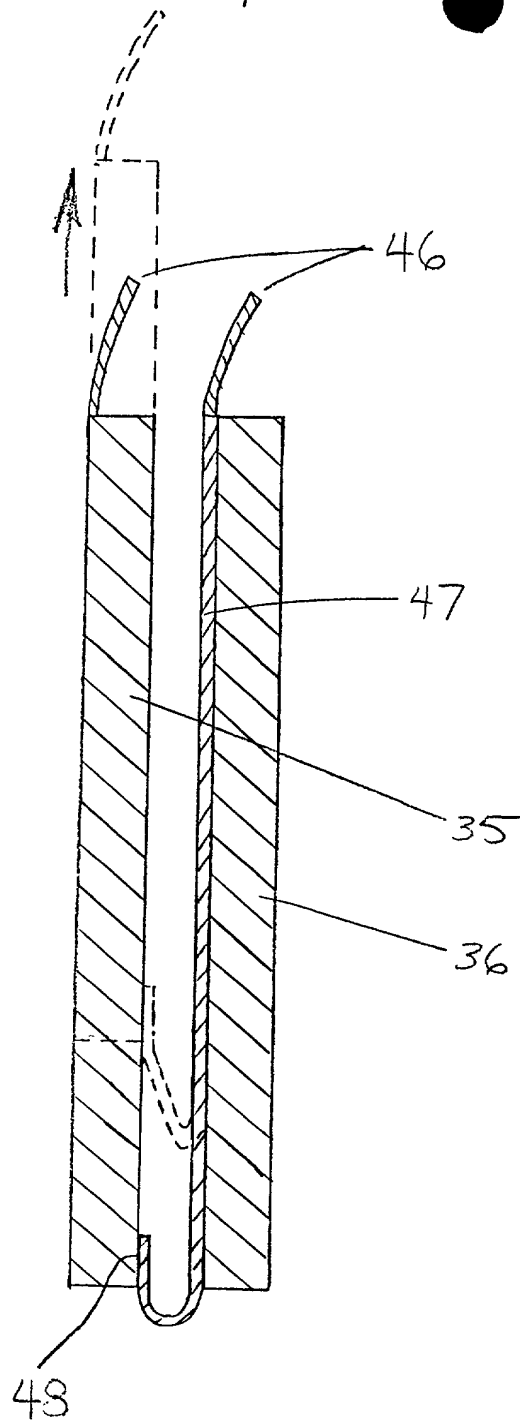


FIG 6

FIG. 7

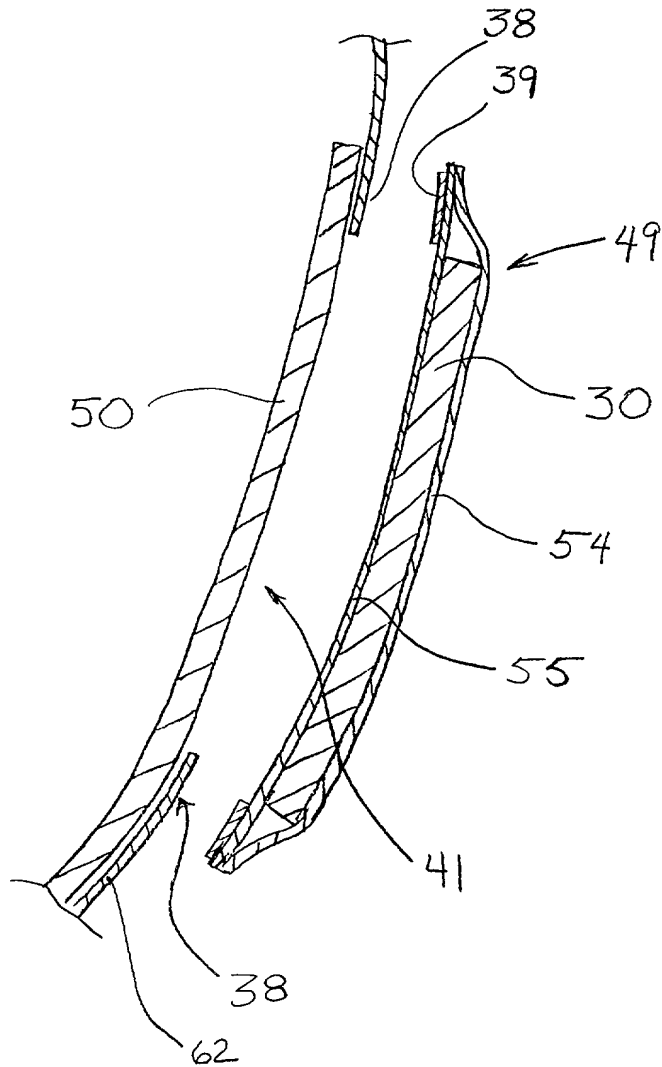
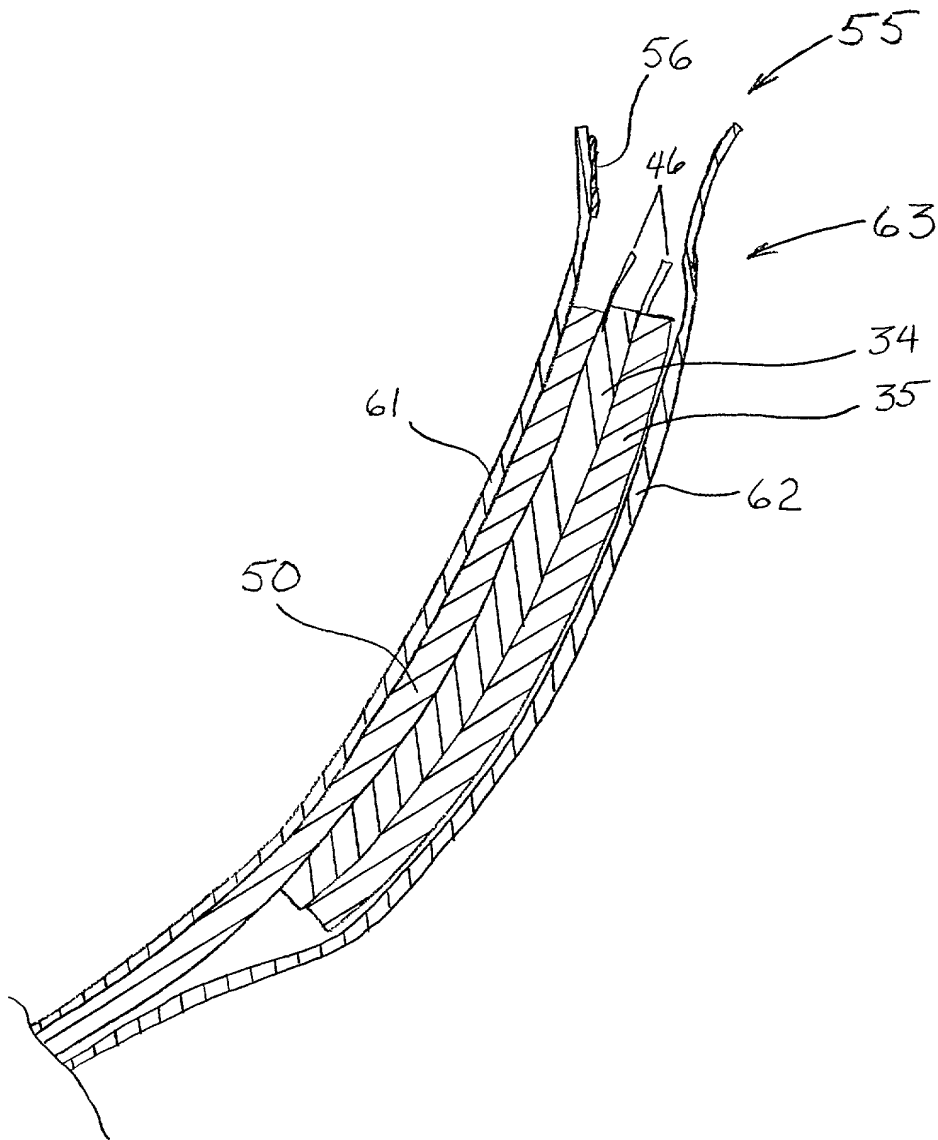


FIG 8



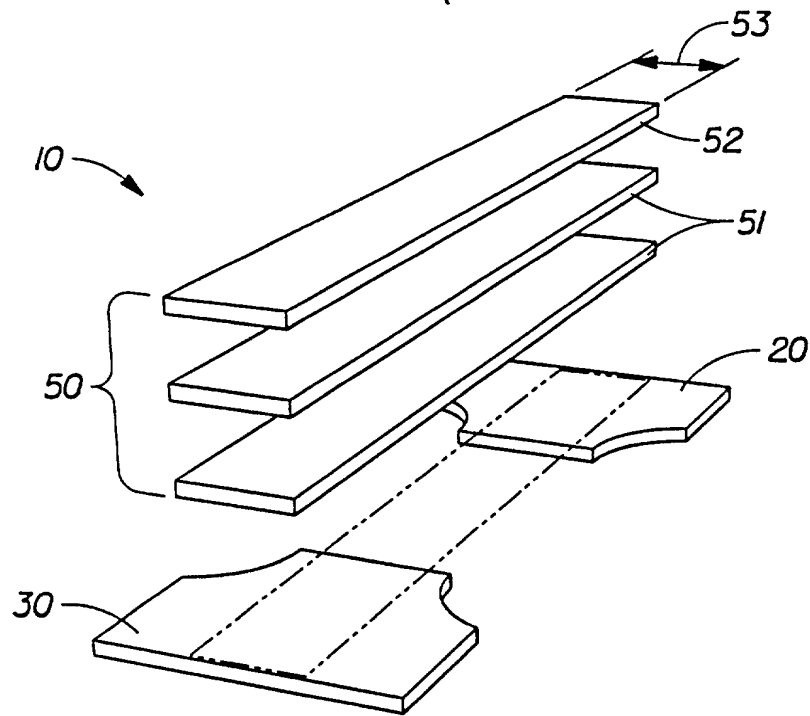


Fig. 9

8/12

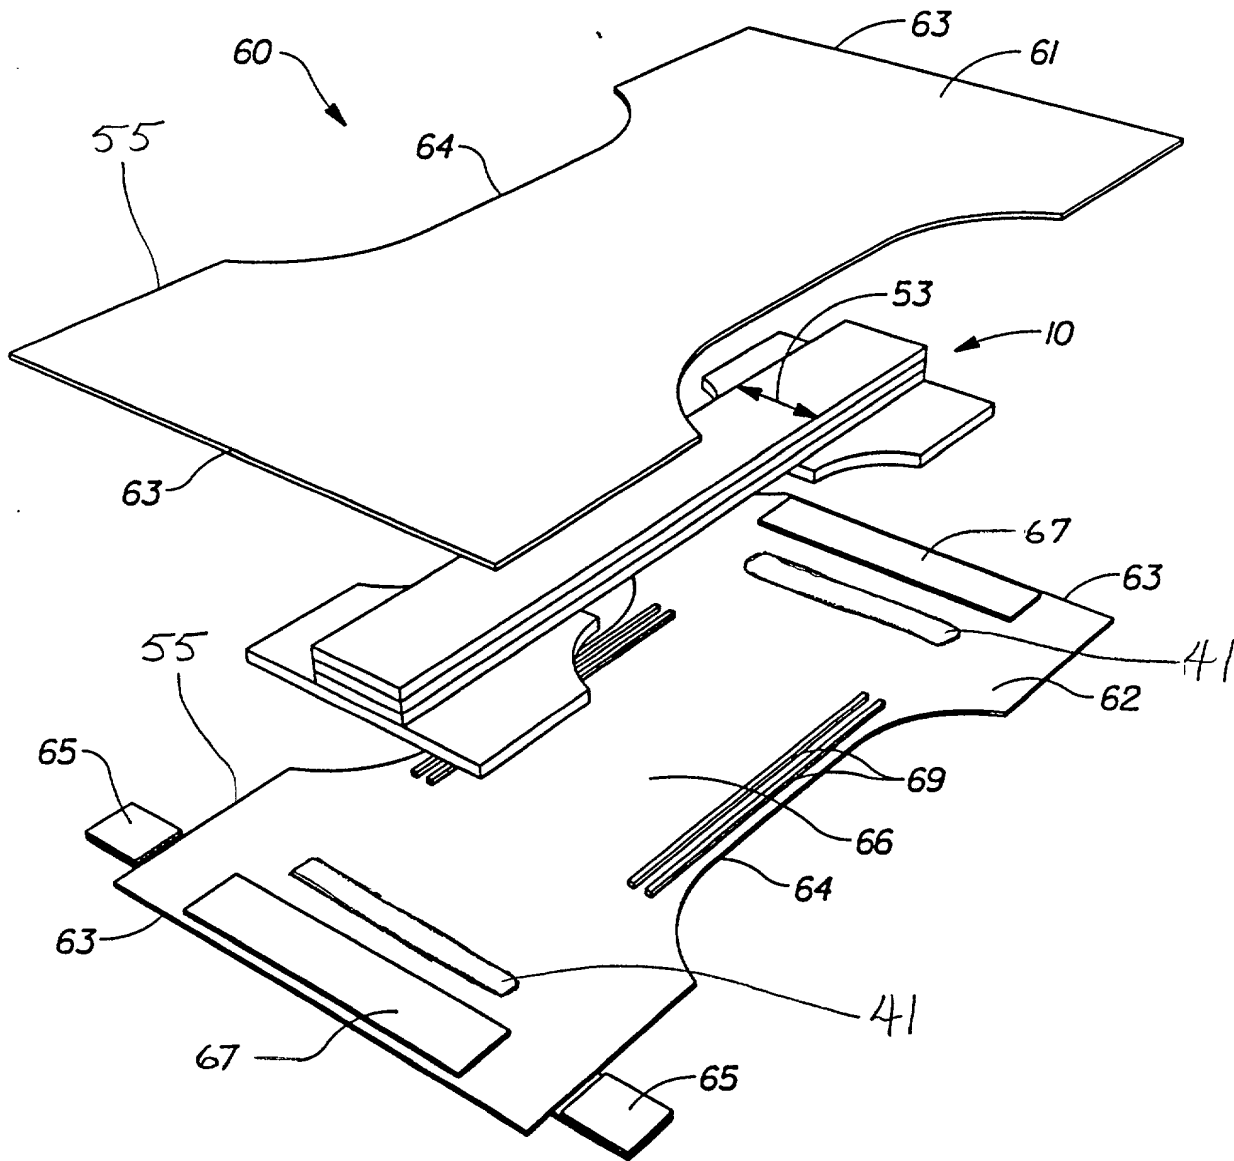


Fig. 10

9/12

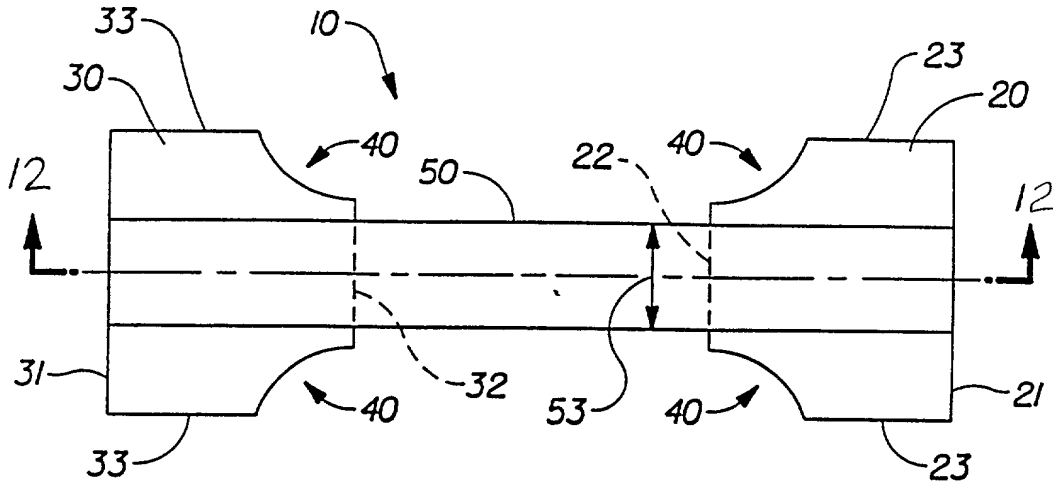


Fig 11

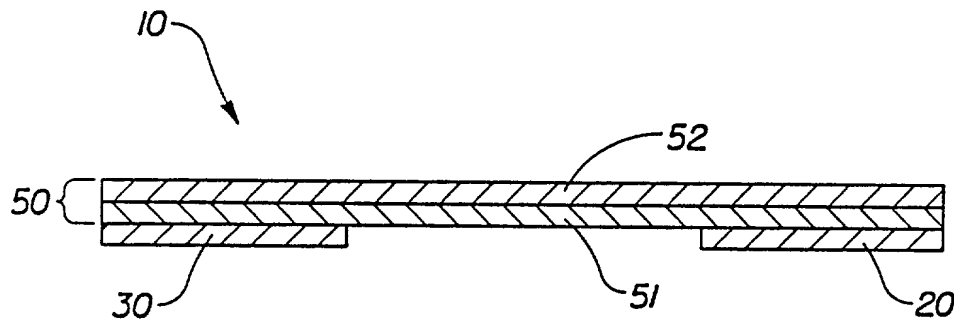


Fig. 12

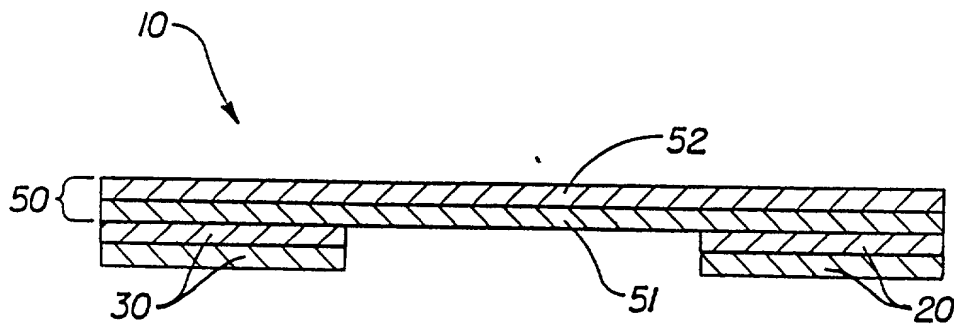


Fig 13

10/12

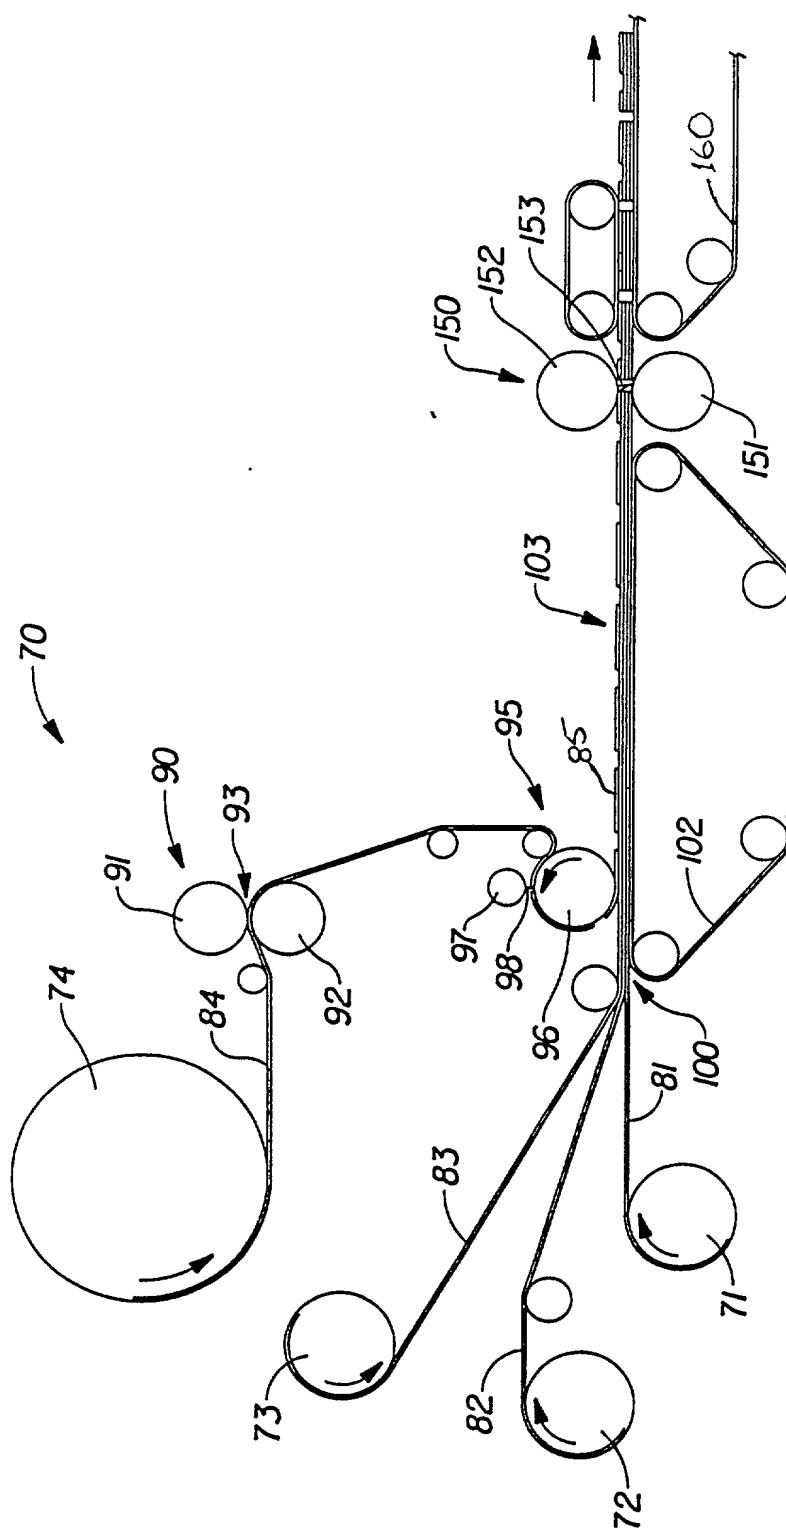


Fig. 14

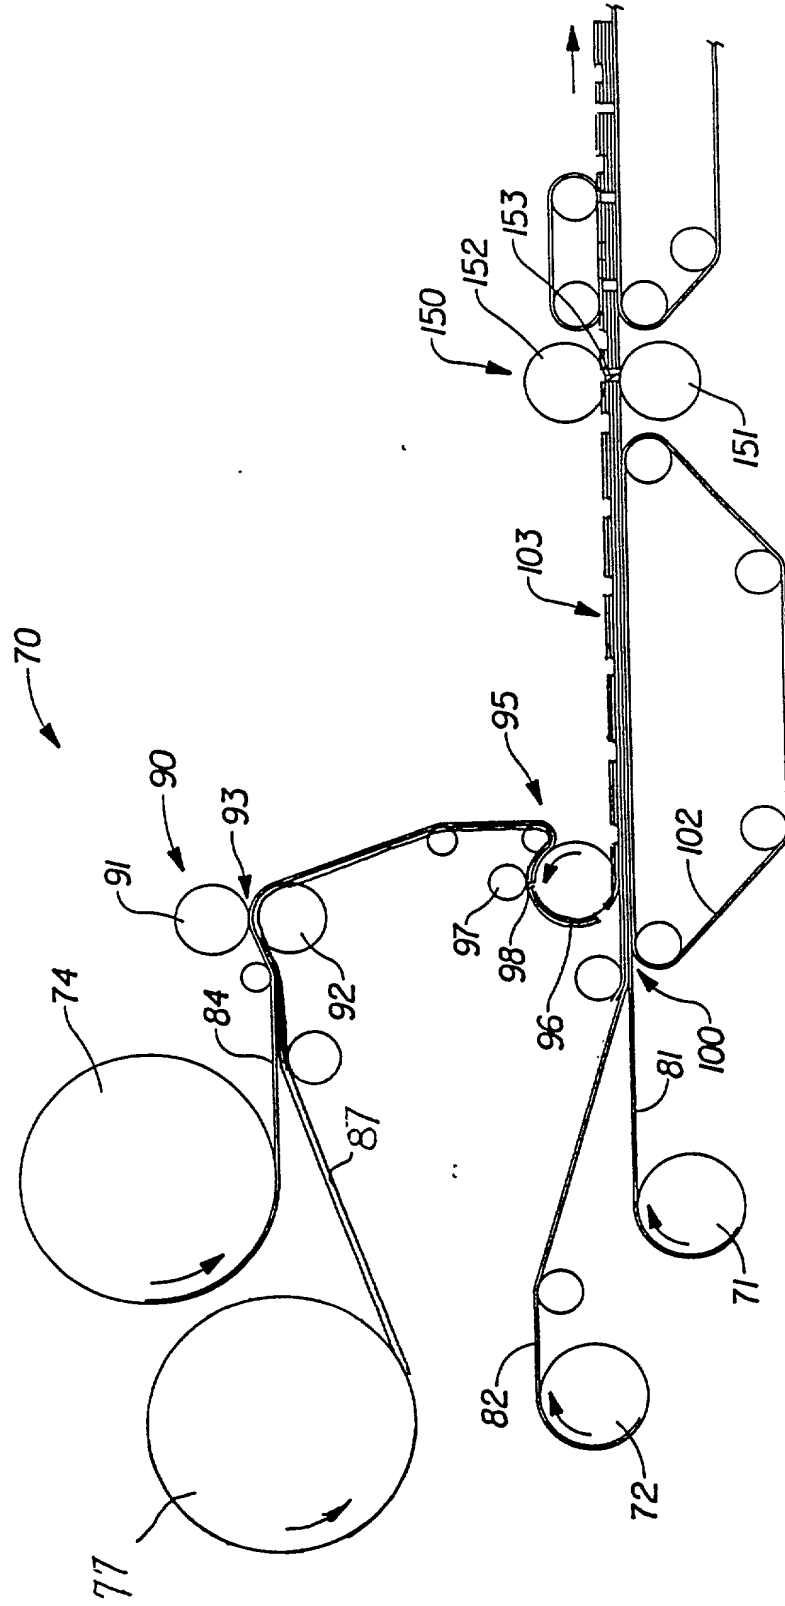


Fig. 15

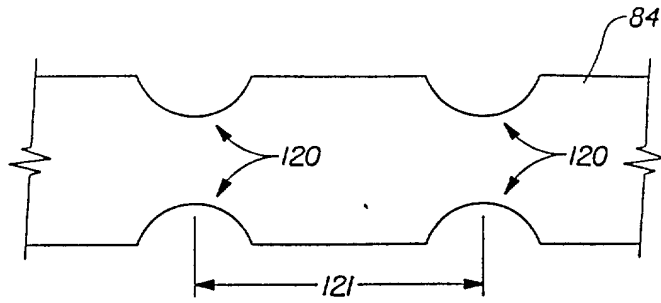


Fig. 16

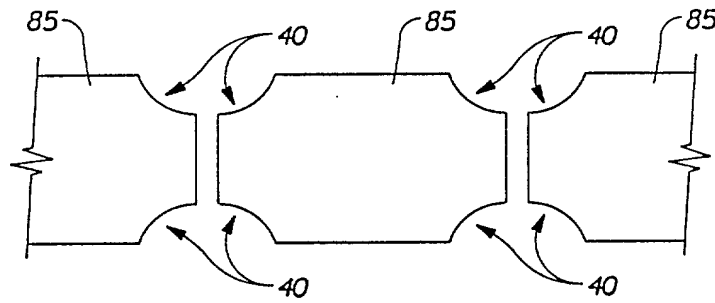


Fig. 17

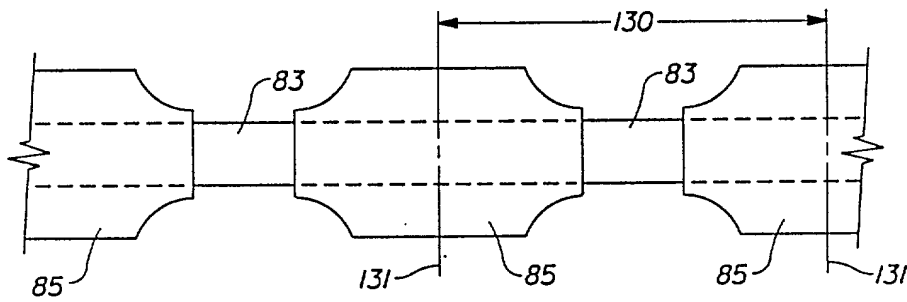


Fig. 18

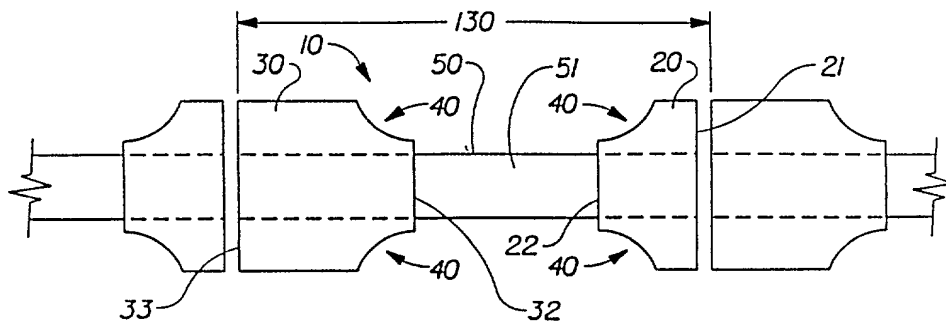


Fig. 19

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **ABSORBENT ARTICLES HAVING REMOVABLE COMPONENTS** the specification of which

(check one) ☒ is attached hereto.
☐ was filed on _____ as
Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37 Code of Federal Regulations §1.56.

I hereby claim foreign priority benefits under Title 35 United States Code §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or Inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>		<u>Priority Claimed</u>	
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Application Serial No.</u>	<u>Filing Date</u>
-------------------------------	--------------------	-------------------------------	--------------------

I hereby claim the benefit under Title 35 United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code §112, I acknowledge the duty to disclose material information as defined in Title 37 Code of Federal Regulations §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)

I hereby appoint the following as my attorney(s) or agent(s) with full power of substitution to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

<u>Atty Name</u>	<u>Atty Reg Number.</u>	<u>Associate Power of Attorney Attached</u>	
Roddy M. Bullock	37,290	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
William Scott Andes	33,582	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Carl J. Roof	37,708	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
E. Kelly Linman	26,759	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Jacobus C. Rasser	37,043	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
T. David Reed	32,931	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No

SEND CORRESPONDENCE TO:

Roddy M. Bullock

The Procter & Gamble Company

(513) 634-1948

Name

Phone No.

Winton Hill Technical Center, 6300 Center Hill Avenue

Cincinnati, Ohio 45224

Street


City

State

Zip Code

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first joint inventor Gary Dean LaVon

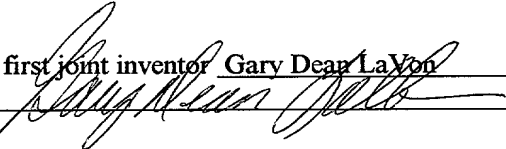Inventor's signature 


3/27/97
Date

Residence 7320 Canterbury Court, Middletown, OH 45044

Citizenship USA

Post Office Address The Procter & Gamble Company, Winton Hill Technical Center
6300 Center Hill Avenue, Cincinnati, OH 45224

Full name of second joint inventor, if any Gerald Alfred Young

Inventor's signature 


3/27/97
Date

Residence 1101 Hearthstone Drive, Cincinnati, OH 45231

Citizenship USA

Post Office Address The Procter & Gamble Company, Winton Hill Technical Center
6300 Center Hill Avenue, Cincinnati, OH 45224

Full name of third joint inventor, if any Theodora (NMN) Beck

Inventor's signature 

3/27/97
Date

Residence 2765 Klondike Court, Cincinnati, OH 45251

Citizenship USA

Post Office Address The Procter & Gamble Company, Winton Hill Technical Center
6300 Center Hill Avenue, Cincinnati, OH 45224